


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 903
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 460 m
 Charge Size 30 lb
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0
 Sample 2 ms
 GAGC Trip 0.47s, Rate 80 db/s
 Int 41 db, Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\alpha = 4.0 \text{ db/sec}$
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel. 1524 mps

DECONVOLUTION
 Time Varying ARD I
 Filter Length 212 m sec
 Gate Length 2200 m sec
 No of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr 1 1.2 sec, Tr 2 4.0, 4.6 sec
 Final times, Gate No 2 :-
 Tr 1 4.5 sec, Tr 2 4.3, 7.6 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack No
 First Break Suppression
 T₁ 0 sec T₂ 1.0 sec
 T₃ 0.6 sec T₄ 1.2 sec
 T₅ 0.8 sec T₆ 1.4 sec

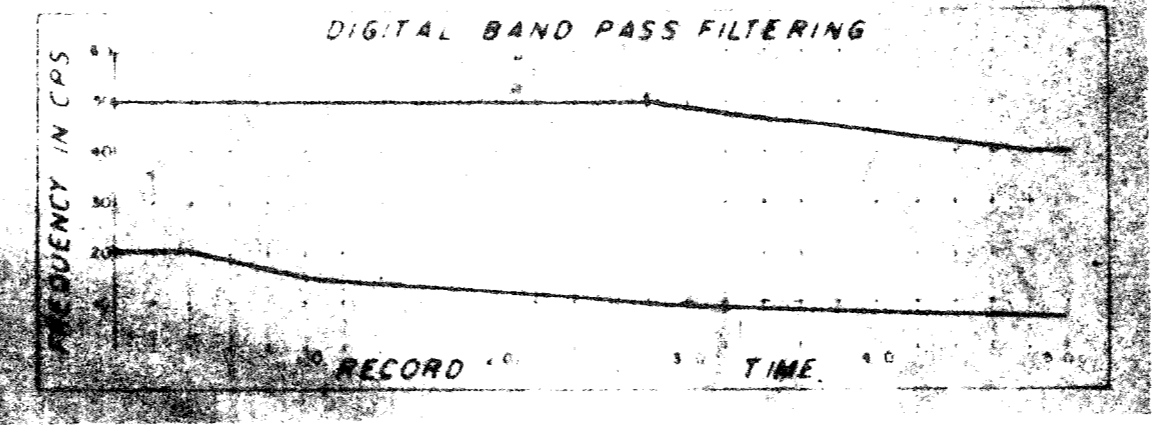

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain
 +12 +6 -22 = -4
 Tape HTL 2156

REQ. N° L-4001
 Section N° 2042-C
 System Code MSTV-2
 Assembled by V. GEADA
 Checked by R. WELCH

LINE B 411
 SP. K 9087

LINE B 412
 SP. K 8505

