


SHOOTING PARAMETERS
 6 Fold Off End
 Shot by GS I PTY 906
 Cable Length 1600 m
 Group Interval 87 m
 Shot Point Interval 134 m
 Average Shot Offset 132 m
 Charge Size 50 m
 Average Seis. Depth 13 m

RECORDING PARAMETERS
 System 9000
 Record Length 5.0
 Sample 2ms
 GAGC Trip 0.78, Rate 80db/s
 Init. 43 db, Final 100db
 Filters Hi: 75cps, 24db/oct
 Lo: 8cps, 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 sec 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1522 mps
 Replacement Vel. 1522 mps

DECONVOLUTION
 Time variant APD I
 Filter Length 220 msec
 Gate Length 2200 sec
 No of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr1 1.5 sec, Tr 2 0.488 sec
 Final times, Gate No 2 :-
 Tr1 1.8 sec, Tr 2 3.788 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack NO
 First Break Suppression
 T₁ 0 sec T₂ 1.0 sec
 T₃ 0.6 sec T₄ 1.2 sec
 T₅ 0.8 sec T₆ 1.4 sec

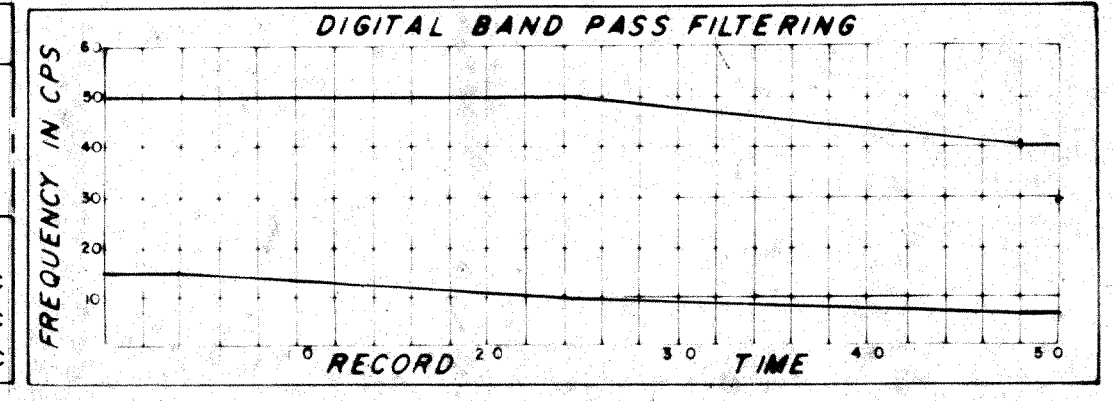

DISPLAY	REQ. N°	L-4112
Analog Filters OUT-OUT	Section N°	1069C
Straight Gain +12 + 0 - 8 + +4	System Code	MSTV-2
Tapes HTL 1146 HTL	Assembled by	MC
	Checked by	

