

**SHOOTING PARAMETERS**

12-Fold Off-End  
 Shot by G.S.1 Ply 906  
 Cable Length 2400m  
 Group Interval 100m  
 Shot Point Interval 100m  
 Average Shot Offset 96m  
 Charge Size 50lb  
 Average Seis Depth 17 m

**RECORDING PARAMETERS**

System 9000  
 Record Length 5.0 sec  
 Sample 2ms  
 GAGC Trip 78s Rate 80db/ft  
 Int 46db Final 100db  
 Filters Hi 75cps 24 db/oct  
 Lo 8cps 24 db/oct  
 2 ms Anti-Alias Filtering

**SEIS EDIT & NMG**

TAR Applied  
 4.0 db/sec 0.4-0.5sec  
 Equalization 2.0-4.5sec  
 Water Velocity 1524 m/sec  
 Replacement Vel 524 m/sec

**DECONVOLUTION**


Time Invariant ARD 1  
 Filter Length 252msec  
 Gate Length 2600msec  
 No. of Gates/Trace 1  
 Initial times, Gate No. 1:-  
 Tr. 1 1.8 sec, Tr. 2 0.42 sec  
 Final times, Gate No. -:-  
 Tr. 1 4.4 sec, Tr. 2 3.02 sec

**12-FOLD STACK**

First Break Suppression  
 Tr. 0 sec Tr. 1.60 sec  
 Tr. 0.20 sec Tr. 1.80 sec  
 Tr. 0.60 sec Tr. 2.00 sec  
 Tr. 1.00 sec Tr. 2.10 sec  
 Tr. 1.20 sec Tr. 2.20 sec  
 Tr. 1.40 sec Tr. 2.30 sec  
 Tr. 2.40 sec  
 Equalization 0.8-4.0 sec

**DIGITAL FILTERING**

Time Varying YES  
 Filter Length 136 ms  
 O/P Sample Period 4 ms  
 O/P Record Length 5sec

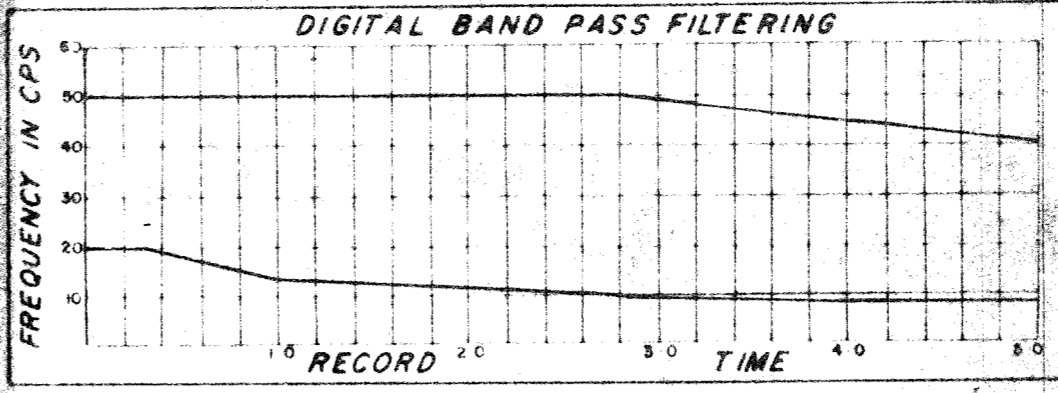

<b>DISPLAY</b>	REQ. N°	L-4158
Single Coverage	System Code	MEDS-3
Analog Filters OUT-OUT	Section N°	3030C
Straight Gain in db +12 + 0 -18 = -6	Assembled by	F. De...
Tape HTL-3067	Checked by	Adh. 154

1 S.E.

