

**SHOOTING PARAMETERS**  
 12-Fold, Off-End  
 Shot by G.S.I. Pty. 906  
 Cable Length 2400m  
 Group Interval 100m  
 Shot Point Interval 100m  
 Average Shot Offset 96m  
 Charge Size 50lb  
 Average Seis. Depth 15 m


**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5.0 sec  
 Sample 2ms  
 GAGC Trip 76 s Rate 80db/s  
 Int. 46db, Final 100db  
 Filters H: 75cps 24 db/oct  
 L: 8cps 24 db/oct  
 2 ms Anti-Alias Filtering

**SEIS EDIT & NMO**  
 TAR Applied  
 4.0 db/sec 0-4.0sec  
 Equalization 2.0-4.5 sec  
 Water Velocity 1524 m/sec  
 Replacement Vel 1524 m/sec

**DECONVOLUTION**  
 Time Invariant ARD 1  
 Filter Length 252msec  
 Gate Length 2600msec  
 No of Gates / Trace 1  
 Initial times, Gate No 1 =  
 Tr 1 1.8 sec, Tr 24 0.42sec  
 Final times, Gate No 1 =  
 Tr 1 4.4 sec, Tr 24 3.02sec

**R<sup>2</sup>-FOLD STACK**  
 First Break Suppression  
 0.2 sec 1.6 sec  
 0.6 sec 2.0 sec  
 1.0 sec 2.1 sec  
 1.2 sec 2.2 sec  
 1.4 sec 2.3 sec  
 2.4 sec  
 Equalization 0.8-4.0 sec

**DIGITAL FILTERING**  
 Time Varying YES  
 Filter Length 136ms  
 O/P Sample Period 4ms  
 O/P Record Length 5sec

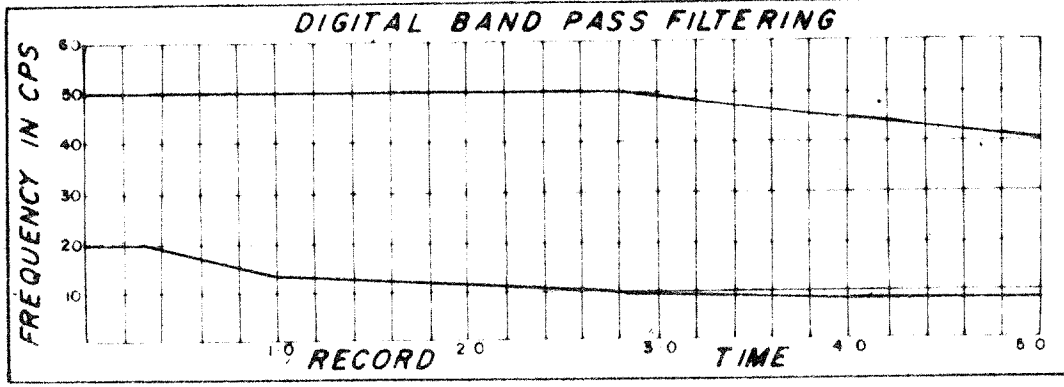

<b>DISPLAY</b>	<b>REQ. N°</b> L-4158
Single Coverage	<b>System Code</b> MEDS-3
Amplifier Filter OUT-OUT	<b>Section N°</b> 3029 C
Straight Gain in db +12 - C - 20 = -8	<b>Assembled by</b> [Signature]
Tape HTL-3067	<b>Checked by</b> [Signature]

Meters 16.1 16.3 16.1 15.7 15.4 15.2 15.0 15.0 15.0 14.9 14.9 14.9 14.760

LINE B 424 SP 12980 152 150 150 150 149 149 149

14524 14530 14550 14570 14590 14610 14630 14650 14670 14690 14710 14730 14750 14760

