

**SHOOTING PARAMETERS**  
 12-Fold, Off End  
 Shot by G.S. 11/11/06  
 Cable Length 2400m  
 Group Interval 100m  
 Shot Point Interval 100m  
 Average Shot Offset 96m  
 Charge Size 50lb  
 Average Sens Depth 14 m


**RECORDING PARAMETERS**  
 System 5000  
 Record Length 5.0 sec  
 Sample 2ms  
 GAGC Trip 78% Rate 10000  
 Int. 4800 Freq 10000  
 Filters: 75db, 24db/oct  
 Lo. Pass 24db/oct  
 2 ms Anti-Alias Filtering

**SEIS EDIT & NMO**  
 TAR Applied  
 4.0 db/sec 0-4.0 sec  
 Equalization 2.5 - 4.0 sec  
 Water Velocity 1524 m/sec  
 Replacement Vel 1524 m/sec

**RECONSTRUCTION**  
 Time interval 4800  
 Filter Length 2500 msec  
 Gate Length 2600 msec  
 No. of Gates / Trace 1  
 Initial times, Gate No. 1  
 Tr 1: 1.0 sec, Tr 2: 0.42 sec  
 Final times, Gate No. 1  
 Tr 1: 4.4 sec, Tr 2: 3.02 sec

**12-FOLD STACK**  
 First Break Suppression  
 0 sec Tr 1: 1.8 sec  
 0.2 sec Tr 1: 1.8 sec  
 0.6 sec Tr 1: 2.0 sec  
 1.0 sec Tr 1: 2.1 sec  
 1.2 sec Tr 1: 2.2 sec  
 1.4 sec Tr 1: 2.3 sec  
 2.4 sec  
 Equalization 0.8 - 4.0 sec

**DIGITAL FILTERING**  
 Time Varying YES  
 Filter Length 136 ms  
 O/P Sample Period 4 ms  
 O/P Record Length 5 sec

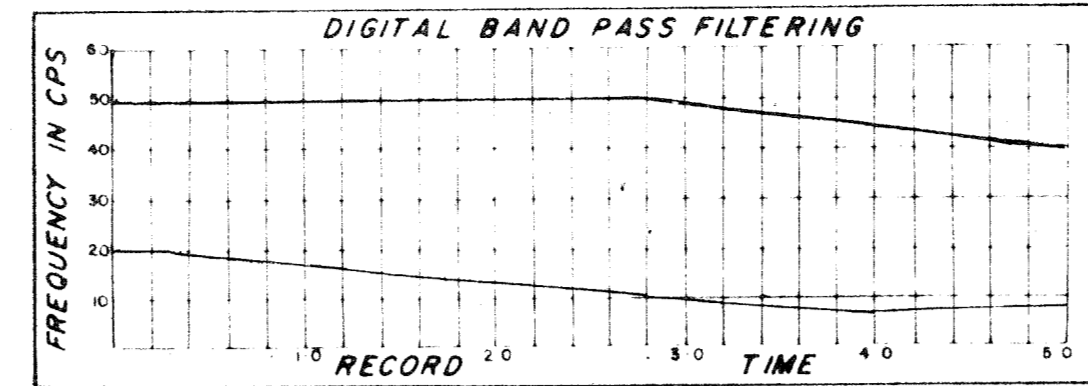

**DISPLAY**  
 Single Coverage  
 Analog Filters OUT-OUT  
 Straight Gain in db  
 +12 +0 -18 -6  
 Tape HTL-3029

**REQ. N°** L-3672  
 System Code ME-D-3  
 Section N° 3016 C  
 Assembled by *bg*  
 Checked by *bg*

LINE 412 S.P. 4142 Meters 203 10169 10170 201 10190 199 10210 196 10230 191 10250 187 10270 183 10290 178 10310 175 10330 172 10350 169 10370 166 10390 165 10410 161 10430 160 Meters

