

**SHOOTING PARAMETERS**  
 12-Field Off-End  
 Shot by G.S.I. Proj. 906  
 Cable Length 2400m  
 Group Interval 100m  
 Shot Point Interval 100m  
 Average Shot Offset 96m  
 Charge Size 50g  
 Average Sens Depth 13 m


**RECORDING PARAMETERS**  
 System 9000  
 Record Length 5.0 sec  
 Sample 2 ms  
 GAGC Trip 75% Rate 90db/a  
 Int +3 db Final 100db  
 Filters Hi 75cps 24db/oct  
 Lo 8cps 24db/oct  
 2 ms Anti-Alias Filtering

**SEIS EDIT & NMO**  
 TAR Applied  
 -4.0 db/sec. 0-4.0sec  
 Equalization 2.5-4.0sec  
 Water Velocity 1524 m/sec  
 Replacement Vel 524 m/sec

**DECONVOLUTION**  
 Time Invariant ARD 1  
 Filter Length 252msec  
 Gate Length 2600msec  
 No. of Gates/Trace 1  
 Initial times, Gate No. 1-  
 Tr. 1 1.8 sec, Tr. 2 4.0-4.2sec  
 Final times, Gate No. 1-  
 Tr. 1 4.4 sec, Tr. 2 3.0-2sec

**12-FOLD STACK**  
 First Break Suppression  
 T<sub>1</sub> 0.2 sec, T<sub>2</sub> 1.8 sec  
 T<sub>3</sub> 0.5 sec, T<sub>4</sub> 1.6 sec  
 T<sub>5</sub> 0.8 sec, T<sub>6</sub> 1.9 sec  
 T<sub>7</sub> 1.0 sec, T<sub>8</sub> 2.0 sec  
 T<sub>9</sub> 1.4 sec, T<sub>10</sub> 2.05sec  
 T<sub>11</sub> 2.1 sec  
 Equalization 0.8-4.0 sec

**DIGITAL FILTERING**  
 Time Varying YES  
 Filter Length 136 ms  
 O/P Sample Period 2ms  
 O/P Record Length 5sec

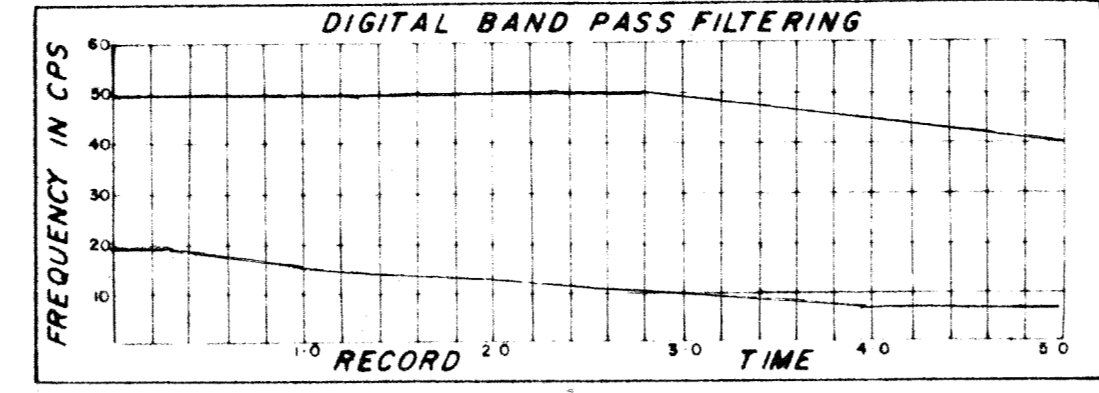

**DISPLAY**  
 Single Coverage  
 Analog Filters OUT-OUT  
 Straight Gain 1.0cc  
 -12 + 0 -20 + 8  
 Tape NTI-3029

REQ. N° L-3671  
 System Code MEDS-3A  
 Section N° 3015C  
 Assembled by *[Signature]*  
 Checked by *[Signature]*

