


SHOOTING PARAMETERS		RECORDING PARAMETERS	
12-Fold Off-End	Shot by G.S.I. Ply. 906	System 9000	
Cable Length 2400m	Record Length 5.0 sec	Sample 2ms	
Group Interval 100m	GAGC Trip Rate 80 db	Average Shot Offset 96m	
Shot Point Interval 100m	Filters Hi 75cps 24 db/oct	Lo 6cps 24 db/oct	
Charge Size 50 lb	2 ms Anti-Alias Filtering		

DECONVOLUTION		DIGITAL BAND PASS FILTERING	
Time invariant ARD 1	Filter Length 252 msec	Gate Length 2600 msec	No. of Gates/Traces 1
Initial times, Gate No 1	Tr. 1 1.8 sec, Tr. 2 0.42 sec	Final times, Gate No 1	Tr. 1 4.4 sec, Tr. 2 3.02 sec

DIGITAL BAND PASS FILTERING	
Frequency in cps	Time
0.2	1.8
0.6	2.0
1.0	2.2
1.2	2.3
1.4	2.4

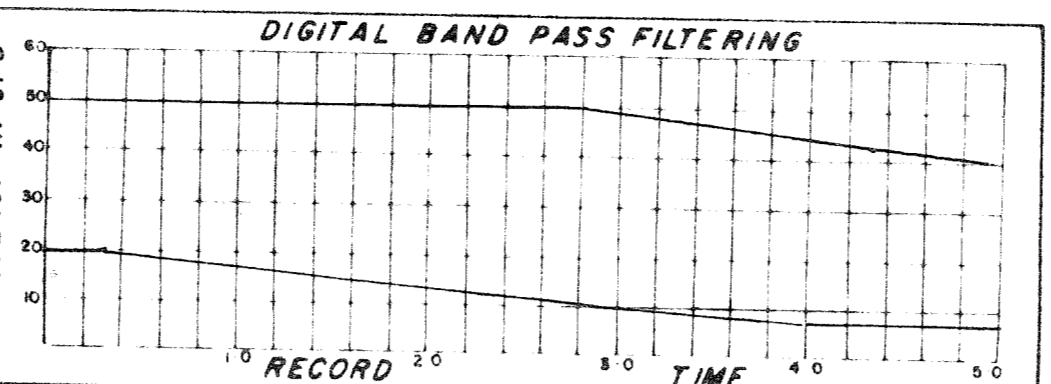

Single Coverage	REC NO. 3670
Angle Filters 50T-OUT	System Interval 100m
Straight Gain in db	014 C
12 - 0 20 = 8	Checked by JyB
Trace HTI-029	

LINE B 415 SP 6866 112 116 120 122 124 126 127 128 132 136 140 144 148 152 156 160 164 168 172 176 180 184 188 192 196 200 204 208 212 216 220 224 228 232 236 240 244 248 252 256 260 264 268 272 276 280 284 288 292 296 300 304 308 312 316 320 324 328 332 336 340 344 348 352 356 360 364 368 372 376 380 384 388 392 396 400 404 408 412 416 420 424 428 432 436 440 444 448 452 456 460 464 468 472 476 480 484 488 492 496 500 504 508 512 516 520 524 528 532 536 540 544 548 552 556 560 564 568 572 576 580 584 588 592 596 600 604 608 612 616 620 624 628 632 636 640 644 648 652 656 660 664 668 672 676 680 684 688 692 696 700 704 708 712 716 720 724 728 732 736 740 744 748 752 756 760 764 768 772 776 780 784 788 792 796 800 804 808 812 816 820 824 828 832 836 840 844 848 852 856 860 864 868 872 876 880 884 888 892 896 900 904 908 912 916 920 924 928 932 936 940 944 948 952 956 960 964 968 972 976 980 984 988 992 996 1000

