


SHOOTING PARAMETERS
6-Fold Off End
Shot by GSI PTY 903
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 160 m
Charge Size 33 1/3 lb
Average Sea Depth 15 m

RECORDING PARAMETERS
System 10,000
Record Length 5.0
Sample 2 ms
GAGC Trip 0.47s Rate 80dbv
Init 4.8 db Final 00 db
Filters Hi 70 cps 12 db/oct
Lo 12 cps 12 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
a = 4.0 db/sec
From 0. sec to 4.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps

DECONVOLUTION
Time Varying ARD I
Filter Length 212 m sec
Gate Length 2200 m sec
No of Gates/Trace 2
Initial times, Gate No 1 :-
Tr1 1.2 sec, Tr 2 4.0 - 4.6 sec
Final times, Gate No 2 :-
Tr1 4.5 sec, Tr 2 3.76 sec

6-FOLD STACK
Optimum Wide Band Stack
NMO Yes Diversity Stack No
First Break Suppression
T₁ 0.5 sec T₂ 1.0 sec
T₃ 0.6 sec T₄ 1.2 sec
T₅ 0.8 sec T₆ 1.4 sec

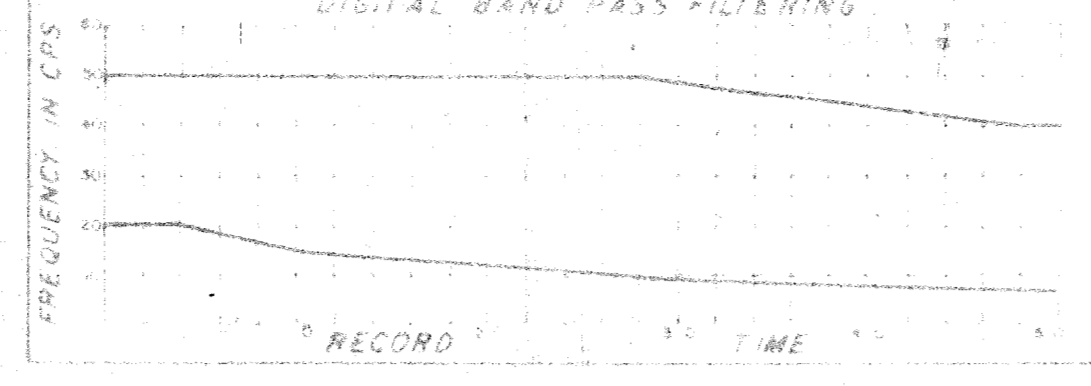

DISPLAY
Coverage
Analog Filter: OUT-OUT
Straight Gain
+18 +4 -20 +12
Tape HTL 2095

REQ. N° L-3685
Section N° 2024-C
System Code MSTV-2
Assembled by V. GEADA
Checked by R. WILSON

