


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 906
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 133 m
Average Shot Offset 114 m
Charge Size 50 lb
Average Sens. Depth 12 m

RECORDING PARAMETERS
System 9000
Record Length 5.0
Sample 2 ms
GAGC Trip 0.7 & Rate 80db/s
Init. 43 db/Final 100db
Filters Hi 75 cps, 24db/oct
Lo 8 cps, 24db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
sec 4.0 db/sec
From 0 sec to 4.0 sec
Water Velocity 1522 mps
Replacement Vel 1522 mps

DECONVOLUTION
Time Invariant ARD E
Filter Length 2.52 msec
Gate Length 2.6 sec
No of Gates/Trace 1
Initial times, Gate No -
Tr 1 1.5 sec, Tr 2 4.488 sec
Final times, Gate No 1 -
Tr 1 4.1 sec, Tr 2 3.088 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes, Diversity Stack Yes
First Break Suppression
T₁ 0 sec T₂ 1.2 sec
T₃ 6.0 sec T₄ 1.4 sec
T₅ 1.0 sec T₆ 1.6 sec

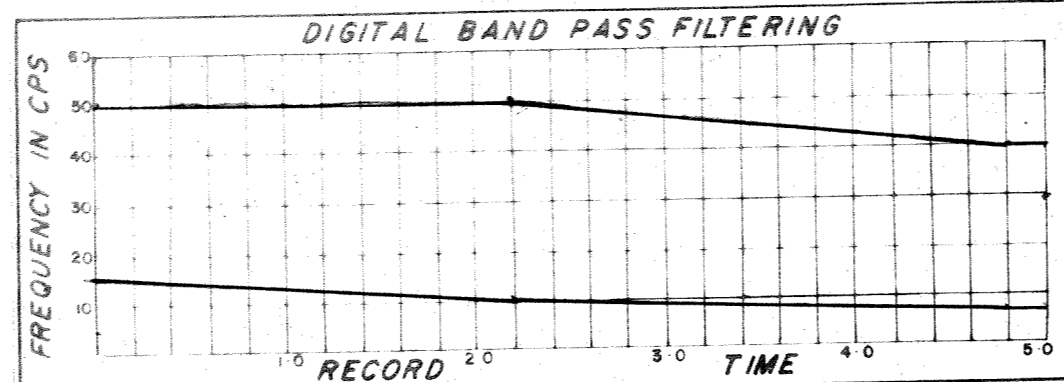

DISPLAY		REQ. N°	L-4206
Analog Filters	OUT-OUT	Section N°	1060C
Straight Gain	+18 + 0 -16 + +2	System Code	MSTV-2
Tapes HTL 1133	HTL	Assembled by	lag
		Checked by	

S.E.

