


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 906
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 138 m
 Charge Size 50 lb
 Average Seis. Depth 15 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 secs.
 Sample 2 ms
 GAGC Trip 0.78s, Rate 80 db/s
 Init. 43 db, Final 100 db
 Filters Hi 75 cps, 24 db/oct
 Lo 8 cps, 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\kappa = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1522 mps
 Replacement Vel. 1522 mps

DECONVOLUTION
 Time variant ARD
 Filter Length 220 msec
 Gate Length 2200 msec
 NP of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr 1.5 sec, Tr 240.488 sec
 Final times, Gate No 2 :-
 Tr 14.8 sec, Tr 24.3788 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 1.2 sec
 T₃ 0.6 sec T₄ 1.4 sec
 T₅ 1.0 sec T₆ 1.6 sec

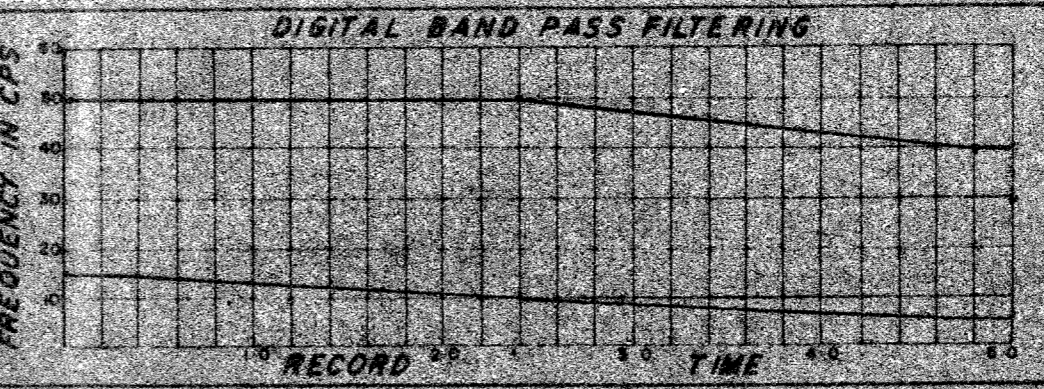

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain
 +12 +4 -18 -2
 Tape HTL 1092

REQ. N°	L-4227
Section N°	1058 C
System Code	MSTV-2
Assembled by	<i>[Signature]</i>
Checked by	<i>[Signature]</i>

→ S.E.

