


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTY 903  
 Cable Length 1600 m  
 Group Interval 57 m  
 Shot Point Interval 134 m  
 Average Shot Offset 160 m  
 Charge Size 50 lb  
 Average Seis. Depth 5m

**RECORDING PARAMETERS**  
 System 10,000  
 Record Length 5.0  
 Sample 2 ms  
 GAGC Tr 0.47s Rate 8100/s  
 Line 4.5 db/ft at 100 db  
 Filters Hi 70 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & AMO**  
**TAR**  
 sec 4.0 db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1524 mps  
 Replacement Val 1524 mps

**DECONVOLUTION**  
 Time Varying ARD 1  
 Filter Length 212 msec  
 Gate Length 2200 msec  
 No of Gates/Trace 2  
 Initial times, Gate No 1 :-  
 Tr1 1.2 sec, Tr 2 4.0 45 sec  
 Final times, Gate No 2 :-  
 Tr1 4.5 sec, Tr 2 4.376 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack No  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1.4 sec  
 T<sub>3</sub> 0.8 sec T<sub>4</sub> 1.6 sec  
 T<sub>5</sub> 1.2 sec T<sub>6</sub> 1.8 sec

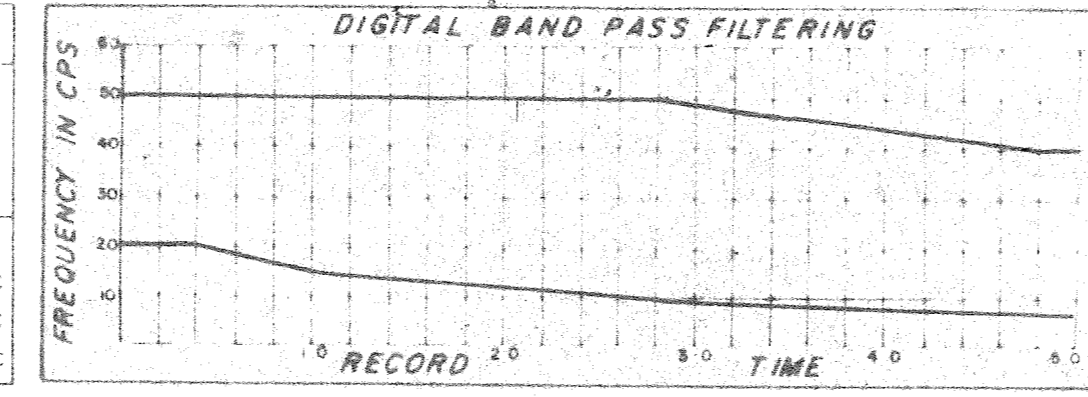

DISPLAY	REQ N°	L-3293
Analog Filters: DUT-DUT	Section N°	2004-C
Straight tone	System Code	MSTV 2
Tape HTL 2038	Assembled by	Sublet
	Checked by	B. Bigas

68 68 Water Depth (Metres) 68 68 69 69 69 70 70 71 71 72 72 72  
 1024 1020 1010 1000 990 980 970 960 950 940 930 920 910 900 890 891

