


SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 906
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 17 m
Charge Size 40 lb
Average Sens. Depth 32 m

RECORDING PARAMETERS
System 9000
Record Length 5.0
Sample 2 ms
CAGC Trip 0.78 Rate 80db/s
Init 40 db Final 100db
Filters Hi 75cps 24db/oct
Lo 8cps 24db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
 $\sigma = 4.0$ db/sec
From 0 sec to 4.0 sec
Water Velocity 1524 mps
Replacement Vel 1524 mps

DECONVOLUTION
Time Invariant ARD I
Filter Length 252 msec
Gate Length 2600 msec
No of Gates/Trace 1
Initial Times, Gate NO 1
Tr1 1.5 sec, Tr2 2.4 @ 488sec
Final Times, Gate NO 1
Tr1 4.1 sec, Tr2 3.0 @ 88sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes, Diversity Stack Yes
First Break Suppression
T₁ 0 sec T₂ 1.2 sec
T₃ 0.6 sec T₄ 1.4 sec
T₅ 1.0 sec T₆ 1.6 sec

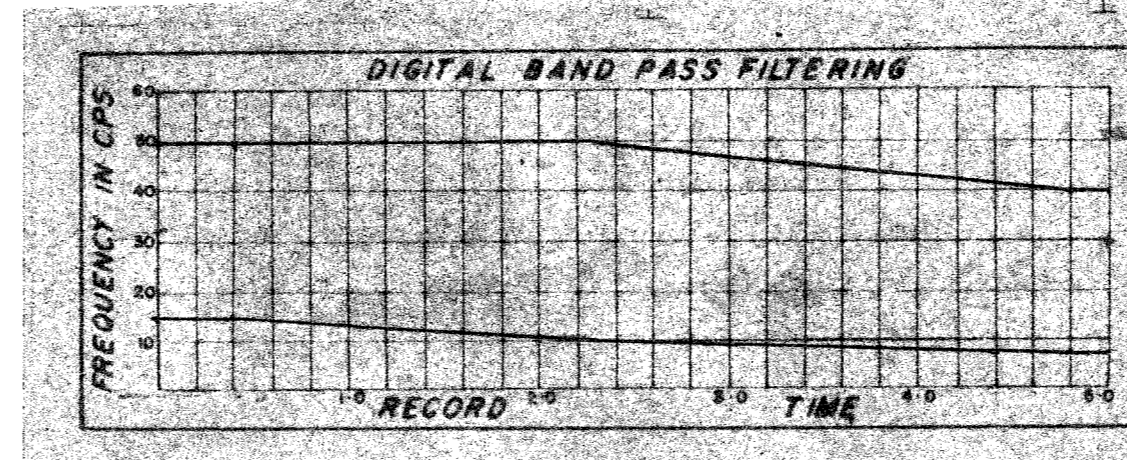

DISPLAY
Analog Filters OUT-OUT
Straight Gain +18 +0 -20 -2
Tapes HTL 1113
HTL
REQ. N° L-4077
Section N° 1049 C
System Code MSTV-2
Assembled by [Signature]
Checked by [Signature]

140 Meters 139 137 136 135 133 131 130 128 128 Meters 127
1211= 14000 1220 1230 1240 1250= 13946 1260 1270 1280 1290 1300 1310 1320 1330
LINE B 428
SP 1032
interpolated Record

