


**SHOOTING PARAMETERS**  
 6 Fold Off End  
 Shot by G.S.I. PTY 903  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 144 m  
 Average Shot Offset 164 m  
 Charge Size 33 (3) lb  
 Average Sea Depth 13 m

**RECORDING PARAMETERS**  
 System 10,000  
 Record Length 5.0  
 Sample 2 ms  
 GAGC Trip 0.47 s Rate 80 db/s  
 Int 4.5 db Final 0.0 db  
 Filters Hi 70 cps 24 db/oct  
 Lo 12 cps 12 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 Par Determination  
 sec 4.0 db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1524 mps  
 Replacement Vel 1524 mps

**DECONVOLUTION**  
 Time Varying ARD I  
 Filter Length 212 m sec  
 Gate Length 2200 m sec  
 No of Gates/Trace 2  
 Initial times Gate N° 1 :-  
 Tr1 1.2 sec Tr 2 4.0 sec  
 Final times Gate N° 2 :-  
 Tr1 4.5 sec Tr 2 3.76 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 Multi-Atten (1) sec  
 (2) sec  
 RNMO Yes Diversity Stack NO  
 First Break Suppression  
 T1=0 sec T2=1.0 sec  
 T3=0.8 sec T4=1.2 sec  
 T5=0.8 sec T6=1.4 sec

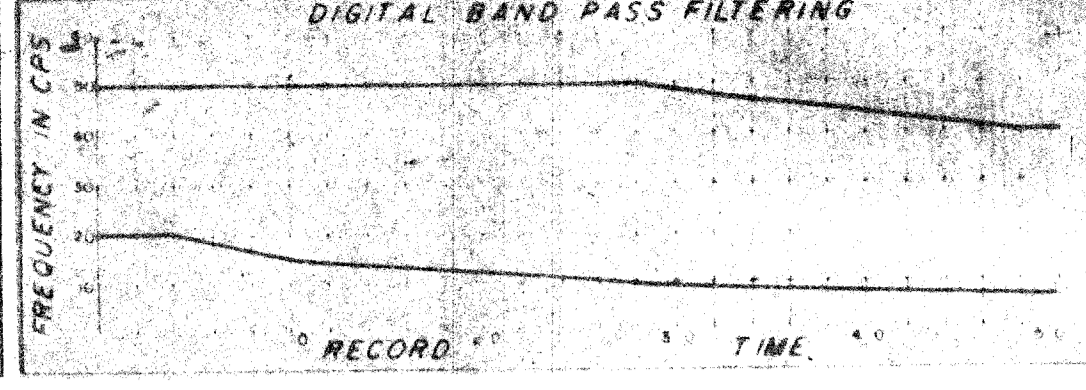

DISPLAY  
 REF NO L-3711  
 Section No 2026-C  
 System Code M.S.T.V. 2  
 Assembled by V. GEADA  
 Checked by R. WELCH  
 Date 11/20/99

