

SHOOTING PARAMETERS	
12-Fold Off-End	Shot by G.S.I. Pty. 906
Cable Length	2400m
Group Interval	100m
Shot Point Interval	96m
Average Shot Offset	96m
Charge Size	50lb
Average Seis. Depth	19m


RECORDING PARAMETERS	
System	9000
Record Length	5.0 sec
Sample	2ms
GAGC Trip	78 s. Rate 80 db
Int. 46db	Final 100db
Filters Hi	75 cps 24 db/oct
Lo	8 cps 24 db/oct
2 ms. Anti-Alias	Filtering

SEIS EDIT & NMO	
TAR Applied	Yes
Water Velocity	1524 m/sec
Replacement Vel	1524 m/sec

DECONVOLUTION	
Time invariant	APD 1
Filter Length	252 msec
Gate Length	2600 msec
No. of Gates / Trace	1
Initial times, Gate No. 1	Tr 1 1.5 sec, Tr 24 0.42 sec
Final times, Gate No. 1	Tr 1 4.4 sec, Tr 24 3.02 sec
Equalization	0.8-4.0 sec

12-FOLD STACK	
First Break Suppression	Yes
Tr 1	0.8 sec, Tr 1.7 sec
Tr 2	1.0 sec, Tr 1.9 sec
Tr 3	1.3 sec, Tr 2.0 sec
Tr 4	1.4 sec, Tr 2.1 sec
Tr 5	1.4 sec, Tr 2.2 sec

DIGITAL FILTERING	
Time Varying	YES
Filter Length	136 ms
O/P Sample Period	4 ms
O/P Record Length	5 sec

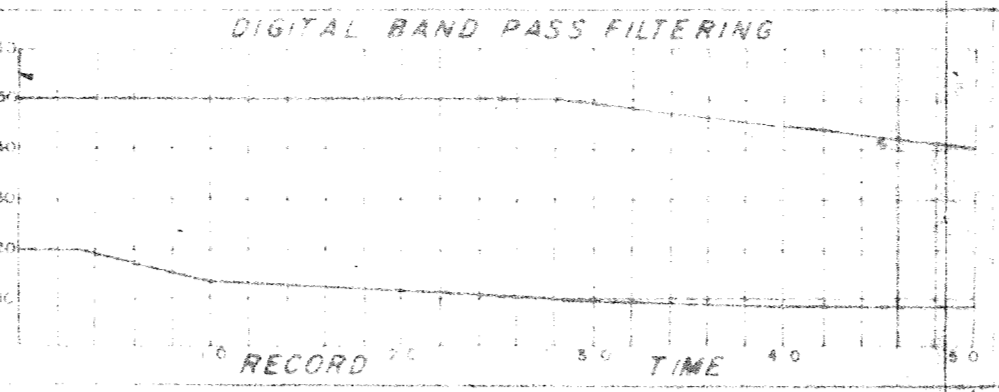

DISPLAY	REQ N°	L-4191
Analog Filters OUT-OUT	System Code	MEDS-3
Straight Gain in db	Section N°	3 031 C
-12 - 0 - 20 - - 8	Assembled by	John Bell
Tape NTL-3 067	Checked by	John Bell

