


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G51 PTY 903  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 160m  
 Charge Size 50 lb  
 Average Sea Depth 15 m

**RECORDING PARAMETERS**  
 System 10,000  
 Record Length 5'0  
 Sample 2 ms  
 GAGC Trip 0.47s Rate 80db/s  
 Init 4.5 db Final 10.0 db  
 Filters H: 70 cps 24 db/oct  
 Lo: 8 cps 24 db/oct  
 2ms Anti Alias Filtering

**SCIS EDIT & NMO**  
 TAR  
 $\alpha = 4.0$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1524 mps  
 Replacement Vel 1524 mps

**DECONVOLUTION**  
 Time Varying ARD 1  
 Filter Length 212 msec  
 Gate Length 2200 msec  
 No of Gates/Trace 2  
 Initial times, Gate No 1 :-  
 Tr1 1.2 sec, Tr 2 4.0 46 sec  
 Final times, Gate No 2 :-  
 Tr1 4.5 sec, Tr 2 4.3 76 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack No  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1.0 sec  
 T<sub>3</sub> 0.6 sec T<sub>4</sub> 1.2 sec  
 T<sub>5</sub> 0.8 sec T<sub>6</sub> 1.4 sec

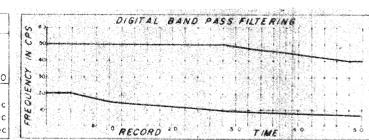

**DISPLAY**  
 Single Coverage  
 Analog Filters OUT-OUT  
 Straight Gain  
 \* 21 \* 0 -12 \* 19  
 Tape HTL 2051

**REQ N°** L-3365  
**Section N°** 2008-C  
**System Code** MSTV-2  
 Assembled by V. SEADA  
 Checked by

