


SHOOTING PARAMETERS
 12-Fold Off End
 Shot by GS I PTY 906
 Cable Length 2400 m
 Group Interval 100 m
 Shot Point Interval 100 m
 Average Shot Offset 96 m
 Charge Size 50 lb
 Average Seis. Depth 16 m

RECORDING PARAMETERS
 System 9000
 Record Length 5.0
 Sample 2 ms
 GAGC Trip 0.64s Rate 80db/s
 Init. 45db Final 100db/s
 Filters Hi 75cps 24db/oct
 Lo 8cps 24db/oct
 2ms Anti-Alias Filtering

SEIS EDIT & NMO
 TAR 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1524 mps
 Replacement Vel 1524 mps

DECONVOLUTION
 Time Invariant ARD I
 Filter Length 252 msec
 Gate Length 2600 sec
 No of Gates/Trace 1
 Initial times, Gate No 1 :-
 Tr1 : 8 sec, Tr24 : 0.42 sec
 Final times, Gate No 1 :-
 Tr1 : 4 sec, Tr24 : 3.02 sec

12 FOLD STACK
 First Break Suppression
 T1 0.2 sec Tr 1.7 sec
 T2 0.8 sec Tr 1.8 sec
 T3 0.9 sec Tr 1.9 sec
 T4 1.4 sec Tr 2.0 sec
 T5 1.5 sec Tr 2.1 sec
 T6 1.5 sec Tr 2.2 sec

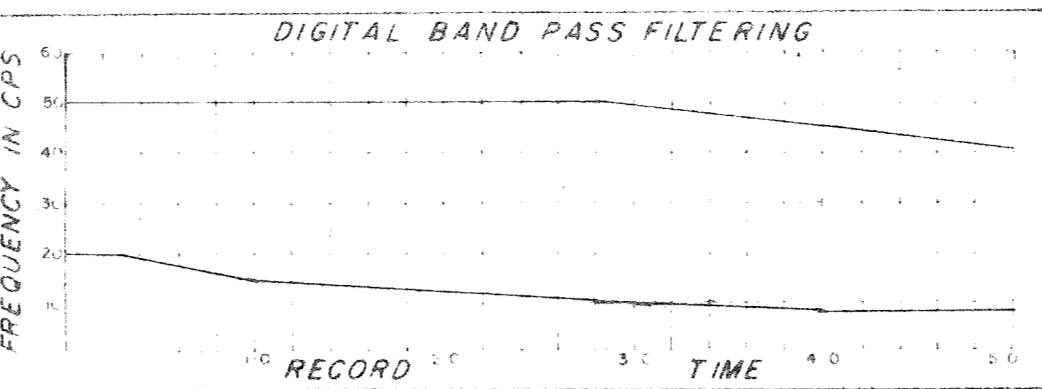

DISPLAY
 Single Coverage
 Analog Filters OUT-OUT
 HTL 3002 (NMO)
 Tapes HTL 3006 (STACK)
 HTL 3007 (TVF)

REQ N° L-2995
 Section N° 3006 A,C,D
 System Code MEDS 3
 Assembled by P. R. S. P.
 Checked by [Signature]

1 SE

