


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 134m
 Charge Size 50 lb
 Average Seis. Depth 15 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 secs.
 Sample 2 ms
 GAGC Trip 064s, Rate 80db/s
 Init 36 db, Final 100 db
 Filters Hi 75 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\llcorner = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1500 mps
 Replacement Vel 1500 mps

DECONVOLUTION
 Time variant ARD 1
 Filter Length 212 msec
 Gate Length 2400 msec
 NO of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr1 1.1 sec, Tr 2 4.0 3 sec
 Final times, Gate No 2 :-
 Tr1 4.7 sec, Tr 2 4 3.9 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 1.2 sec
 T₃ 0.6 sec T₄ 1.6 sec
 T₅ 1.0 sec T₆ 2.0 sec

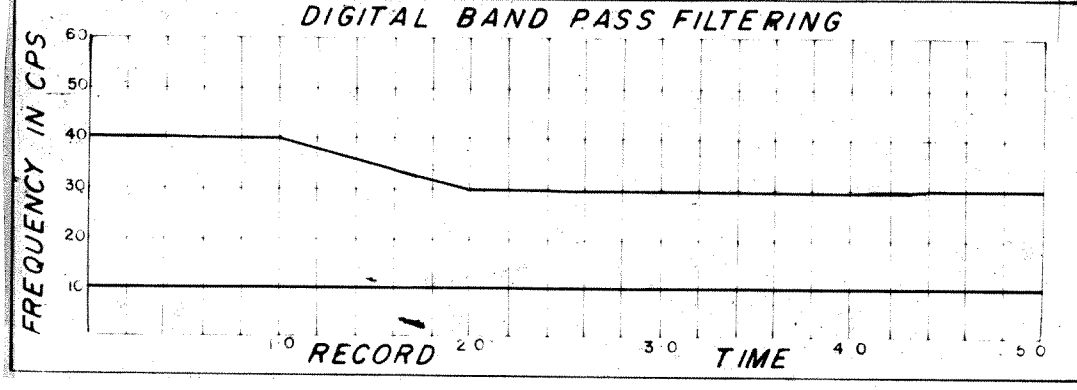

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain +12 + 0 - 8 + + 4
 Tape HTL 4278
 HTL

REQ. N°	L-1892
Section N°	4 167 C
System Code	MSTV-2
Assembled by	<i>[Signature]</i>
Checked by	<i>[Signature]</i>

NE

18 Meters 19 20 22 23 25 27 30 32 35 39 43 Meters 45
 H 4187 H 4190 H 4200 H 4210 H 4220 H 4230 H 4240 H 4250 H 4260 H 4270 H 4280 H 4290 H 4300 H 4306

