


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 134m
 Charge Size 50 lb
 Average Seis. Depth 15 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 sec.
 Sample 2 ms
 GAGC Trip 0.78; Rate 80db/s
 Int 36 db; Final 100db
 Filters Hi 75 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\kappa = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1500 mps
 Replacement Vel 1500 mps

DECONVOLUTION
 Time variant ARD1
 Filter Length 212 msec
 Gate Length 2400 msec
 N° of Gates/Trace 2
 Initial times, Gate No 1 :-
 Tr1 1.1 sec, Tr 24 0.3 sec
 Final times, Gate No 2 :-
 Tr14 7 sec, Tr 24 3.9 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₄ 1.2 sec
 T₂ 0.6 sec T₅ 1.4 sec
 T₃ 1.0 sec T₆ 1.6 sec

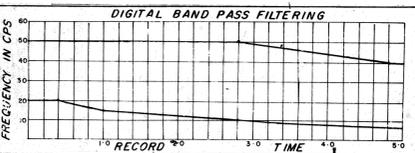

DISPLAY		REQ. N°	L- 1225
Analog Filters OUT-OUT		Section N°	4139 C
Straight Gain +18 +0 -20 = -2		System Code	MSTV-2
Tape HTL 4235		Assembled by	<i>[Signature]</i>
HTL		Checked by	<i>[Signature]</i>

