


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by GS I PTY 910
 Cable Length 1600 m
 Group Interval 65.5 m
 Shot Point Interval 1.53 m
 Average Shot Offset 131 m
 Charge Size 50 lb
 Average Sea Depth 17 m

RECORDING PARAMETERS
 System 9000
 Record Length 5.0
 Sample 2ms
 GAGC Trip 0.78s Rate 80db/s
 Int 33 db Final 100 db
 Filters Hi 75 cps 24db/oct
 Lo 8cps 24db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 < 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1490 m/s
 Replacement Vel 1490 m/s

DECONVOLUTION
 Time variant ARD I
 Filter Length 0.220 sec
 Gate Length 2.200 sec
 No of Gates/Trace 2
 Initial times, Gate No 1
 Tr 1 1.4 sec, Tr 2 4.0-5.26 sec
 Final times, Gate No 2
 Tr 1 4.7 sec, Tr 2 4.3-6.62 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack Yes
 First Break Suppression
 T₁ 0.0 sec T₂ 1.2 sec
 T₃ 0.6 sec T₄ 1.4 sec
 T₅ 1.0 sec T₆ 1.6 sec

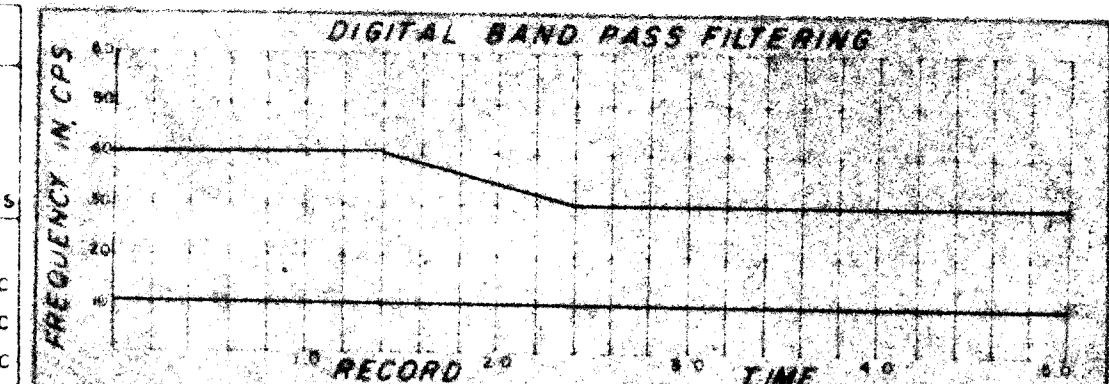

DISPLAY
 Analog Filters ON CUT
 Straight Gain
 +12 + 0 -18 = 6
 Tapes HTL 1532
 HTL

REQ N° L-2240
 Section N° 1169 C
 System Code MST V 2
 Assembled by
 Checked by

