


SHOOTING PARAMETERS	
6-Fold Off End	
Shot by G.S. PTY 910	
Cable Length 1600 m	
Group Interval 65.5 m	
Shot Point Interval 133 m	
Average Shot Offset 131 m	
Charge Size 50 lb	
Average Seis. Depth 18m	

RECORDING PARAMETERS	
System 9000	
Record Length 5-0	
Sample 2 ms	
64GC Trip 0.73s Rate 80db/s	
Int 30 db Final 100 db	
Filters Hi 75 cps 24db/oct	
Lo 8 cps 24db/oct	
2ms Anti Alias Filtering	

SEIS EDIT & NMO	
TAR	
40 db/sec	
0 sec to 4 sec	
Water Velocity 1493 m/s	
Replacement Vel 1493 m/s	

DECONVOLUTION	
Time variant ARD I	
Filter Length 220 msec	
Gate Length 22 sec	
NO of Gates/Trace 2	
Initial times, Gate No 1 :-	
Tr 1 1.5 sec, Tr 2 4.768 sec	
Final times, Gate No 2 :-	
Tr 1 4.8 sec, Tr 2 4.068 sec	

6-FOLD STACK	
Optimum Wide Band Stack	
RNMO Yes, Diversity Stack Yes	
First Break Suppression	
T ₁ 0 sec T ₂ 1.2 sec	
T ₃ 0.6 sec T ₄ 1.4 sec	
T ₅ 1.0 sec T ₆ 1.6 sec	

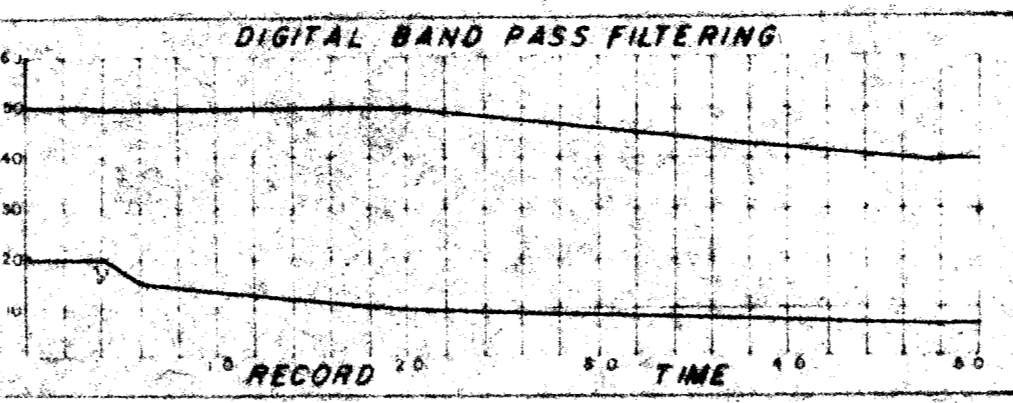

DISPLAY	
Analog Filters OUT OUT	
Straight Gain +12 +2 -20 + -6	
Tapes HTL 1325 HTL	
REQ. N° L-2216	
Section N° 1168C	
System Code MSTV-2	
Assembled by D. COX	
Checked by [Signature]	

LINE D 451 S.P. H6220
 95 meters 95 95 96 96 97 99 102 104 105 105 112 116 116 meters
 H8057 8050 8040 8030 8020 8010 8000 7990 7980 7970 7960 7950 7940 7933

