


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by GS 1 PLY 910  
 Cable Length 1607 m  
 Group Interval 6.5 s  
 Shot Point Interval 15.2 m  
 Average Shot Offset 135 m  
 Charge Size 50 lb  
 Average Sea Depth 19 m

**RECORDING PARAMETERS**  
 System 9060  
 Record Length 5.0  
 Sample 2 ms  
 G-4GC Trip 0.78s Rate 80db/s  
 Int 30 db Final 100 db  
 Filters Hi 75 cps 24db/oct  
 Lo 8cps 21db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
**TAR**  
 sec 4.0 db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1520 m/s  
 Replacement Vel 1520 m/s

**DECONVOLUTION**  
 Time variant ARD   
 Filter Length 0.220 sec  
 Gate Length 2.20 sec  
 No of Gates/Trace 2  
 Initial times, Gate No 1 -  
 Tr 1 1.3 sec, Tr 2 0.558 sec  
 Final times, Gate No 2 -  
 Tr 4 6 sec, Tr 24 3.858 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1.2 sec  
 T<sub>3</sub> 0.8 sec T<sub>4</sub> 1.4 sec  
 T<sub>5</sub> 1.0 sec T<sub>6</sub> 1.6 sec

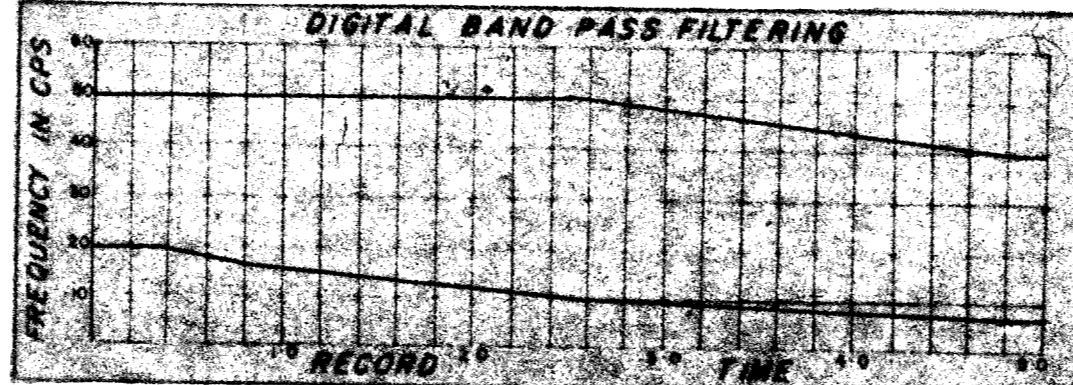

**DISPLAY**  
 Analog Filters on/off  
 Straight Gain  
 +12.0 -14.2  
 Tapes HTL 1321  
 HTL

REQ No L-2217  
 Section No 1167 C  
 System Code M S V 2  
 Assembled by S  
 Checked by

