


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 134m
 Charge Size 50 lb
 Average Seis Depth 1 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 secs
 Sample 2 ms
 GAGC Trip 0.47s, Rate 80db/s
 Init 36 db, Final 100 db
 Filters Hi 75 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\infty = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1500 mps
 Replacement Vel 1500 mps

DECONVOLUTION
 Time variant ARD 1
 Filter Length 212 msec
 Gate Length 24.00 msec
 No of Gates/Trace = 2
 Initial times, Gate No 1 :-
 Tr 1: 1 sec, Tr 2: 4.0 3 sec
 Final times, Gate No :-
 Tr 1: 4.7 sec, Tr 2: 4.3 9 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₄ 0.8 sec
 T₂ 0.4 sec T₃ 1.0 sec
 T₅ 0.6 sec T₆ 1.2 sec

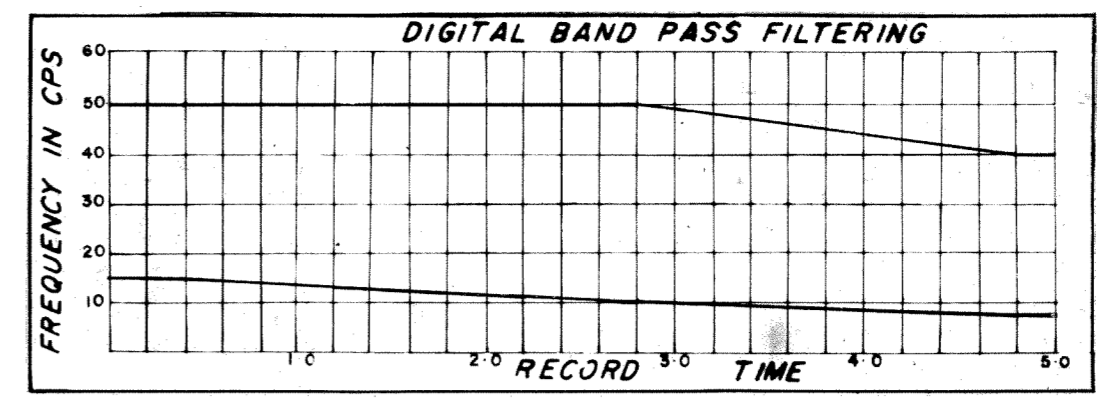

DISPLAY
 Analog Filters OUT - OUT
 Straight Gain +12 +4 -20 -4
 Tape HTL 4212
 HTL

REQ. N° L-1054
 Section N° 4129 C
 System Code MSTV-2
 Assembled by [Signature]
 Checked by [Signature]

17 Meters 17 18 18 19 21 23 24 Meters 26
 H 1160 1150 1140 1130 1120 1110 1100 1090 H 1082

