


SHOOTING PARAMETERS
 24-Fold Off End
 Shot by G-S-I-PTY 908
 Cable Length 1600m.
 Group Interval 65 m.
 Shot Point Interval 4X33m.
 Average Shot Offset 405 m.
 Charge AIR GUN
 Average Seis Depth 14 m.

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0
 Sample 4 ms
 SA 10 Trip 0.95 Rate 80 db/s
 Gain 58 db Final 100 db
 Filters 70 cps 24 db/oct
 1.8 cps 24 db/oct
 4 cps 40 db/oct Filtering

SEIS EDIT & NMO
 *AR
 0.4 Cub/Sec
 From 1.0 sec to 4.0 sec
 Water Velocity 1494 mps
 Replacement vel. 1494 mps
 Equalization = 1-5-3-8

24-FOLD STACK
 First Break Suppression
 Tr₁ Tr₂ 0 secs Tr₃ Tr₄ 1.82 secs
 Tr₅ Tr₆ 0.4 secs Tr₇ Tr₈ 1.92 secs
 Tr₉ Tr₁₀ 1.0 secs Tr₁₁ Tr₁₂ 2.05 secs
 Tr₁₃ Tr₁₄ 1.22 secs Tr₁₅ Tr₁₆ 2.15 secs
 Tr₁₇ Tr₁₈ 1.3 secs Tr₁₉ Tr₂₀ 2.25 secs
 Tr₂₁ Tr₂₂ 1.72 secs Tr₂₃ Tr₂₄ 2.35 secs
 Equalization =

DECONVOLUTION
 Time Varying ARD I
 Filter Length 252 m sec
 Gate Length 2520 m sec
 No. of Gates Trace 2
 Initial Times Gate No. 1
 Tr₁ = 600 sec Tr₂₄ = 600 sec
 Final Times Gate No. 2
 Tr₁ = 4380 sec Tr₂₄ = 4380 sec

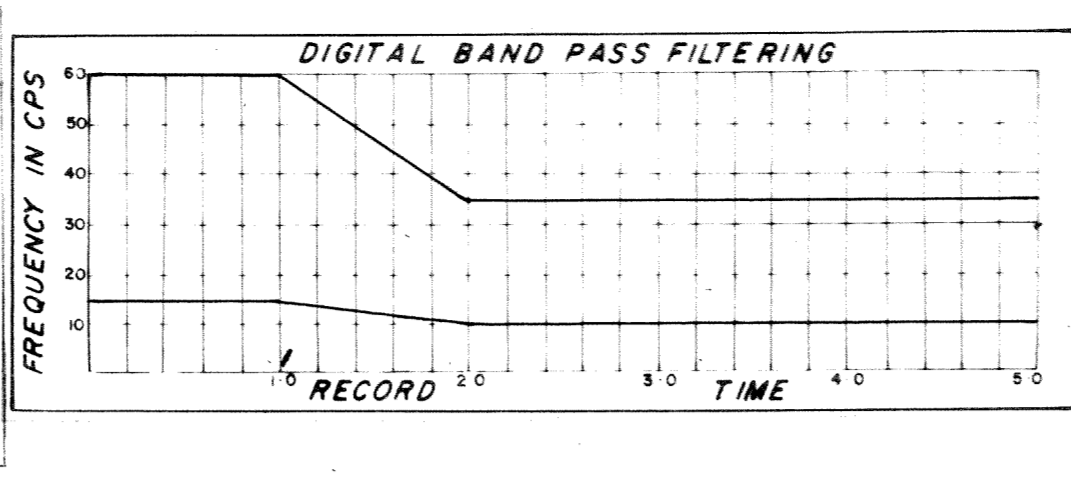

DISPLAY	REQ No	L 3597
Analog Filters CUT - OUT Straight Gain + 12 + 6 - 16 + 2	Section No	1505 C
	System Code	CS A
Type HTL- 1447	Assembled by	R. J. ...
	Checked by	

