


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTX 906  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 132 m  
 Charge Size 50 lb  
 Average Sea Depth 15 m

**RECORDING PARAMETERS**  
 System 9,000  
 Record Length 5.0  
 Sample 2 ms  
 GAGC Trip 0.7 @ Rate 80 db/s  
 Int 46 db Final 90 db  
 Filters Hi 75 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 T&R  
 $\alpha = 4.0$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1494 mps  
 Replacement Vel 1494 mps

**DECONVOLUTION**  
 Time Invariant ARD  
 Filter Length 25.2 msec  
 Gate Length 28.00 msec  
 No of Gates/Trace 1  
 Initial times  
 Tr1 125 sec, Tr 24 0.95 sec  
 Final times  
 Tr1 4.05 sec, Tr 24 3.75 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack NO  
 First Break Suppression  
 T. 0. sec T. 1. 0 sec  
 T. 0.4 sec T. 1. 2 sec  
 T. 0.8 sec T. 1. 4 sec

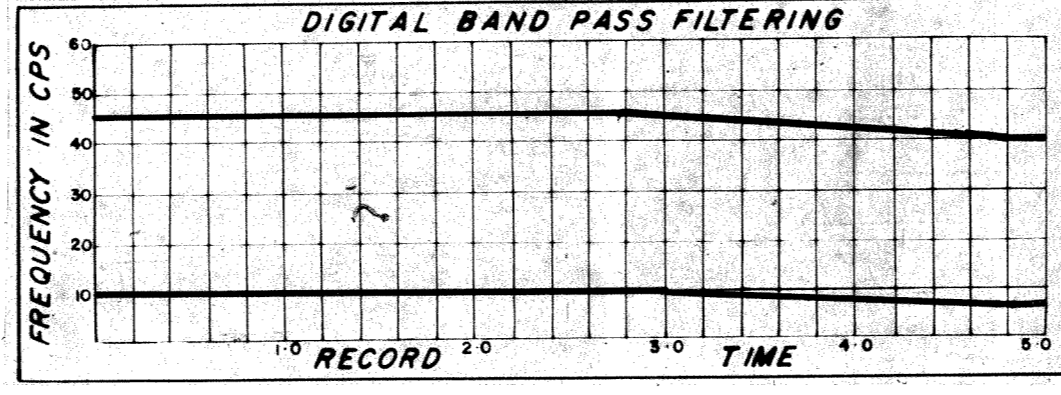

**DISPLAY**  
 Analog Filters OUT - OUT  
 Straight Gsa  
 + 12 + 0 - 20 - 8  
 Tape HTL 2125

REQ N° L-316  
 Section N° 2097-C  
 System Code MSTV 2  
 Assembled by V. GEDA  
 Checked by *R. W. G.*

