


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. P11906
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 132 m
 Charge Size 30 lb
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5-0
 Sample 2 ms
 GAGC Trip 0.7 sec Rate 80 db/s
 Init. 46 db Final 90 db
 Filters Hi: 75 cps 24 db/oct
 Lo: 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 sec 4.0 db/sec
 From 0 set to 4.0 sec
 Water Velocity 1494 m/s
 Replacement Vel 1494 m/s

DECONVOLUTION
 Time Invariant ARD
 Filter Length 252 msec
 Gate Length 2800 msec
 No of Gates/Trace 1
 Initial Times
 Tr1 1.25 sec Tr 2 40.951 sec
 Final Times
 Tr1 4.05 sec Tr 2 43.751 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack No
 First Break Suppression
 T₁ 0.4 sec T₂ 0.8 sec
 T₃ 0.4 sec T₄ 1.0 sec
 T₅ 0.6 sec T₆ 1.2 sec

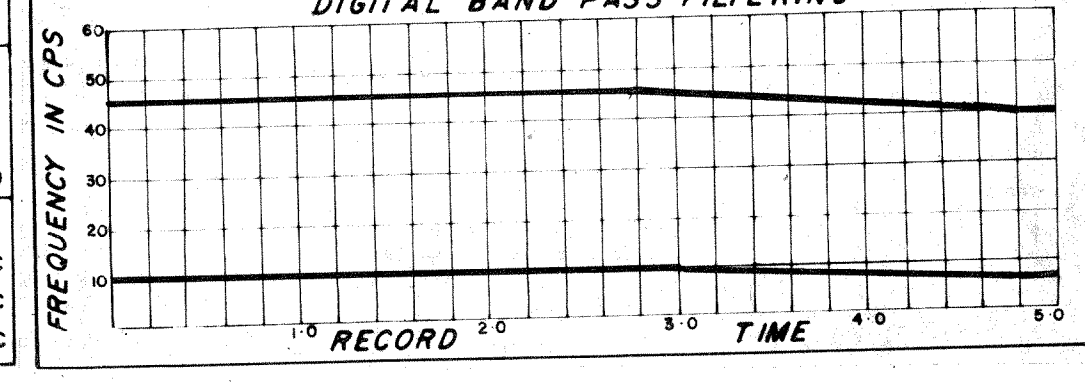

DISPLAY
 Analog Filters On T. Out
 Straight Gain
 * 12 * 2 * 18 * 4
 Tape HTL 2125

REQ N°	L-338
Section N°	2096-C
System Code	MSTV 2
Assembled by	V. GEDA
Checked by	<i>[Signature]</i>

