


SHOOTING PARAMETERS
 24-Fold Off End
 Shot by G-S-1-PTY 909
 Cable Length 1600m
 Group Interval 6.5 m
 Shot Point Interval 4X33m
 Average Shot Offset 382 m
 Charge AIR Gun
 Average Seis Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0
 Sample 4 ms
 GAGC/Trip 1-1 sRate 80 db/s
 In 60 db Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 4ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\alpha = 4.0 \text{ db/sec}$
 From 1.0 sec to 4.0 sec
 Water Velocity 1494 mps
 Replacement Vel. 1494 mps
 Equalisation = 15-38 sers

24-FOLD STACK
 First Break Suppression
 $T_{24} = T_{23} = 0 \text{ sec}$ $T_{12} = T_{11} = 2.0 \text{ sec}$
 $T_{22} = T_{21} = 0.25 \text{ sec}$ $T_{11} = 2.5 \text{ sec}$
 $T_{21} = 0.8 \text{ sec}$ $T_{11} = 2.2 \text{ sec}$
 $T_{11} = 1.3 \text{ sec}$ $T_{11} = 2.5 \text{ sec}$
 $T_{11} = 1.5 \text{ sec}$ $T_{11} = 2.5 \text{ sec}$
 $T_{11} = 1.75 \text{ sec}$ $T_{11} = 2.6 \text{ sec}$

DECONVOLUTION
 Time Varying ARD I
 Filter Length 252 m. sec.
 Gate Length 2520 m. sec.
 No. of Gates Traces 2
 Initial Times Gate No. I
 $T_1 = 0.6 \text{ sec}$ $T_2 = 0.6 \text{ sec}$
 Final Times Gate No. 2
 $T_1 = 4.38 \text{ sec}$ $T_2 = 4.38 \text{ sec}$

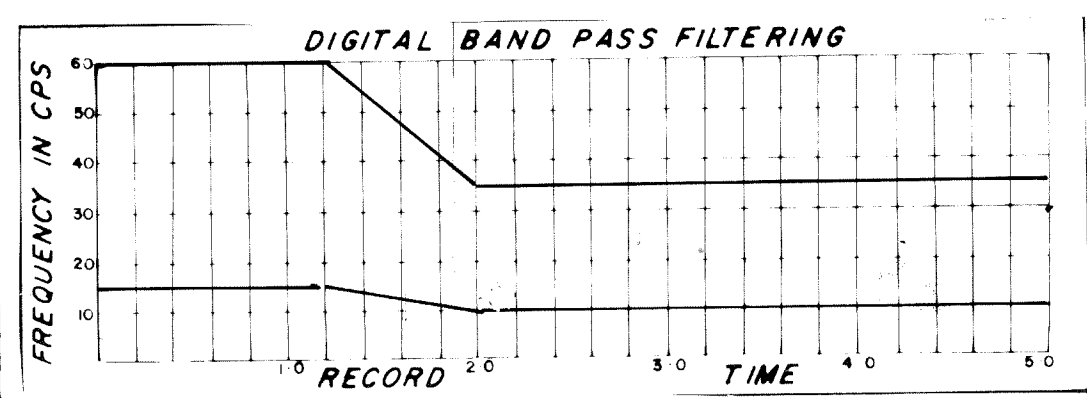

DISPLAY
 Analog Filters OUT - OUT
 Straight Gain
 +12 - 6 - 20 - 2
 Tape MTL-1500
 REQ. No. L-4195
 Section No. 1519 C
 System Code CSA
 Assembled by AMA
 Checked by RBW

LINE D-449 S.P. B 4817 406
 Meters 183 165 195 201 229 311 403 418 384 397 4520 183 189 Meters
 B 4423 B 4430 B 4440 B 4450 B 4460 B 4470 B 4480 B 4490 B 4500 B 4510 B 4520 B 4530 B 4536

