


SHOOTING PARAMETERS
24-Fold Off End
Shot by G-S-I-PTY 908
Cable Length 1600m.
Group Interval 65 m.
Shot Point Interval 4133m.
Average Shot Offset 399 m.
Charge AIR GUN
Average Seis Depth 20 m.

RECORDING PARAMETERS
System 10,000
Record Length 5.0
Sample 4 ms
GAGC Trip 0.9 s Rate 80 db/s
Int. 60 db Final 100db
Filters Hi 70 cps 24 db/oct
Lo 8 cps 24 db/oct
4ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
$\kappa = 4.0$ db/sec.
From 1.0 sec to 4.0 sec.
Water Velocity 1494 mps
Replacement Vel. 1494 mps
Equalization=1.5-3.6

24-FOLD STACK
First Break Suppression
$T_{241}, T_{242} = 0$ secs $T_{12}, T_{11} = 1.82$ sec.
$T_{120}, T_{121} = 0.4$ secs $T_{10}, T_{11} = 1.98$ sec.
$T_{120}, T_{121} = 0$ secs $T_{10}, T_{11} = 2.09$ sec.
$T_{121}, T_{122} = 1.22$ secs $T_{12}, T_{11} = 2.10$ sec.
$T_{121}, T_{122} = 1.3$ secs $T_{12}, T_{11} = 2.23$ sec.
$T_{121}, T_{122} = 1.72$ secs $T_{12}, T_{11} = 2.38$ sec.

DECONVOLUTION
Time Varying ARD I
Filter Length 2520m. sec.
Gate Length 2520m. sec.
No. of Gates Trace 2
Initial Times Gate No. 1
$T_1 = 0.6$ sec $T_{24} = 0.6$ sec.
Final Times Gate No. 2
$T_1 = 4.38$ sec. $T_{24} = 4.38$ sec.

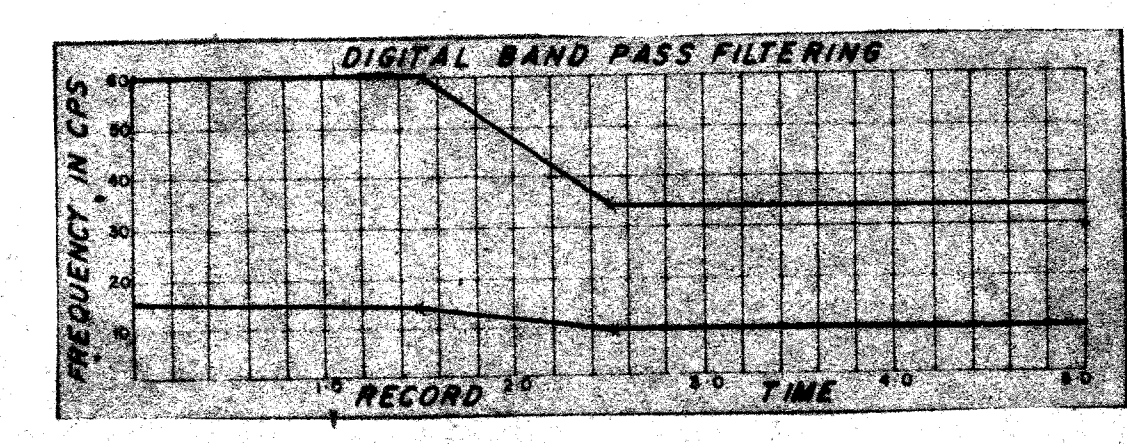

DISPLAY	REQ. No.	L-3594
Analog Filters OUT -10UT	Section No.	1520 C
Straight Gain	System Code	C S A
+18+0-18=0	Assembled by	
Tape HTL-1447	Checked by	S.E.

