


SHOOTING PARAMETERS
 24-Fold Off Epd
 Shot by G.S.I.-PTY 908
 Cable Length 1600m
 Group Interval 6.5 m
 Shot Point Interval 4x53m
 Average Shot Offset 382 m
 Charge Air 30%
 Average Shot Depth 11 m

RECORDING PARAMETERS
 System 10.000
 Record Length 5.0
 Sample 4 ms
 GAGC Trip 0.9 Rate 80 db/s
 Int. 60 db Final 100%
 Filters Hi 70 c/s 24 db/oct
 Lo 8 cps 24 db/oct
 4ms Anti Aliq Filtering

SEIS EDIT & NMO
 TAR
 $\alpha = 4.0$ db/sec
 From 1.0 sec to 4.0 sec
 Water Velocity 1494 mps
 Replacement Vel. 1494 mps
 Equalisation 1.5-3.8 secs

24-FOLD STACK
 First Break Suppression
 Tr₂₄ Tr₂₃ 0 secs Tr₁₂ Tr₁₁ 1.65 secs
 Tr₂₂ Tr₂₁ 0.15 secs Tr₁₀ Tr₉ 1.85 secs
 Tr₂₀ Tr₁₉ 0.3 secs Tr₈ Tr₇ 2.0 secs
 Tr₁₈ Tr₁₇ 0.65 secs Tr₆ Tr₅ 2.1 secs
 Tr₁₆ Tr₁₅ 1.0 secs Tr₄ Tr₃ 2.2 secs
 Tr₁₄ Tr₁₃ 1.4 secs Tr₂ Tr₁ 2.3 secs

DECONVOLUTION
 Time Varying ARD I
 Filter Length 252 m. sec.
 Gate Length 2520 m. sec.
 No. of Gates Trace 2
 Initial Times Gate No. 1
 Tr₁ = 0.6 sec Tr₂₄ = 0.6 sec
 Final Times Gate No. 2
 Tr₁ = 4.38 sec Tr₂₄ = 4.38 sec

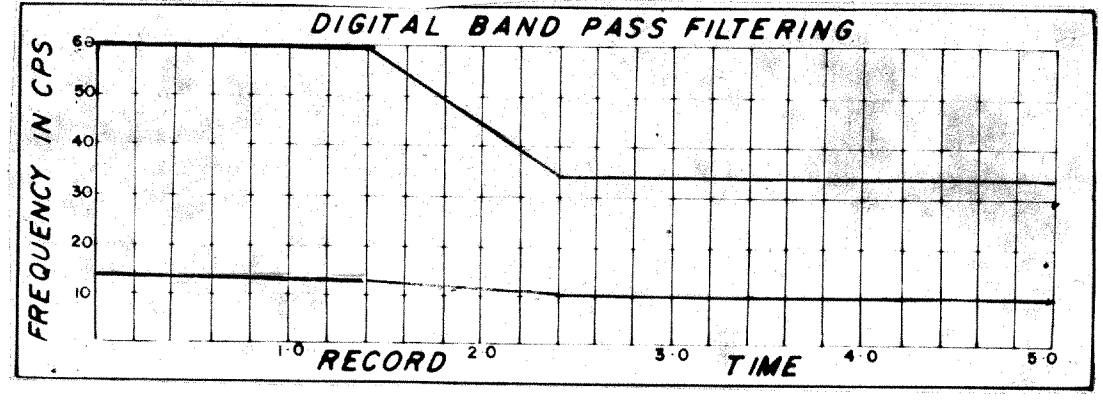

DISPLAY
 Analog Filters OUT - OUT
 Straight Gain
 +12 + 6 - 20⁻²
 Tape HTL - 1500
 REQ. No. L-3972
 Section No. 1524 C
 System Code CSA
 Assembled by AHA
 Checked by E. Bocher
 SSW

LINE D-471
 S.P. 4700
 LINE D-449
 S.P. 4680

