


SHOOTING PARAMETERS
 24 Fold Off Line
 Shot by G-51 P11 909
 Cable Length 1600 m
 Group Interval 6.5 m
 Shot Point Interval 4.33 m
 Average Shot Offset 3.99 m
 Charge AIR Gun
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0
 Sample 4 ms
 GAGC Trip 0.9 s Rate 80 db/s
 Int 54 db Final 100 db
 Filters Hi 80 cps 24 db/oct
 Lo 8 cps 24 db/oct
 4 ms Anti Alias Filtering

SEIS EDIT & NMO
 N/A Applied
 1/4 Octave Filter 4.0 sec
 Equalization 0.6
 N/A Applied 16.94 m/sec

24-FOLD STACK
 First Break Suppression
 Max Trg 0 sec Trg Trj 1.0 sec
 Trg Trj 0.10 sec Trg Trj 2 sec
 Trg Trj 0.20 sec Trg Trj 4 sec
 Trg Trj 0.4 sec Trg Trj 5 sec
 Trg Trj 0.6 sec Trg Trj 6 sec
 Trg Trj 0.8 sec Trg Trj 7 sec

DECONVOLUTION
 Time Varying ARD 1
 Filter Length 212 msec
 Gate Length 2200 msec
 No. of Gates / Trace 3
 Initial and Final Times
 Gate 1 0.6 sec 2.8 sec
 Gate 2 1.7 sec 3.9 sec

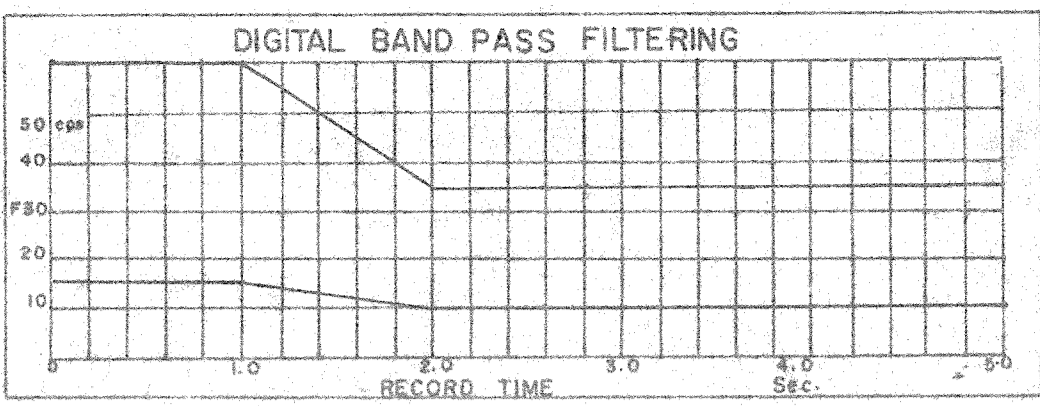

REQ No. L 3944
 Section No. 2539-C
 System Code C S A
 Assembly No. V GEADA
 Checked by B. Biggs
 12 0 10 +2
 2452

LINE D471
 SR. 84760

86 86 METERS 85 87 90 93 93 95 97 98 98 METERS 99 100
 B 5696 5700 5710 5720 5730 5740 5750 5760 5770 5780 5790 5800 5800

