

**SHOOTING PARAMETERS**

24-Fold Off End  
 Shot by G.S. PTY 903  
 Cable Length 1600m  
 Group Interval 60 m  
 Shot Point Interval 40.0m  
 Average Shot Offset 399 m  
 Charge 400g  
 Average Shot Depth 15 m

**RECORDING PARAMETERS**

System 10,000  
 Record Length 5.0  
 Sample 4 ms  
 GAGC Trip 0.9 Rate 8096/s  
 Int. 54 db Final 100.00  
 Filters Hi 70 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 4ms Anti Aliq Filtering

**SEIS EDIT & AMO**


CR Applied  
 1400/sec 0.40 sec  
 Equalization 0.4 - 40 sec  
 Alter. velocity 493 m/sec

**24-FOLD STACK**

First Break Suppression  
 Tr<sub>24</sub> Tr<sub>15</sub> 0 sec Tr<sub>12</sub> Tr<sub>11</sub> 1.0 sec  
 Tr<sub>22</sub> Tr<sub>11</sub> 0.1 sec Tr<sub>10</sub> Tr<sub>9</sub> 1.2 sec  
 Tr<sub>20</sub> Tr<sub>9</sub> 0.2 sec Tr<sub>8</sub> Tr<sub>7</sub> 1.4 sec  
 Tr<sub>18</sub> Tr<sub>7</sub> 0.4 sec Tr<sub>6</sub> Tr<sub>5</sub> 1.5 sec  
 Tr<sub>16</sub> Tr<sub>5</sub> 0.6 sec Tr<sub>4</sub> Tr<sub>3</sub> 1.6 sec  
 Tr<sub>14</sub> Tr<sub>3</sub> 0.8 sec Tr<sub>2</sub> Tr<sub>1</sub> 1.7 sec

**DECONVOLUTION**

Time Invariant 3RD  
 Filter Length 212 msec  
 Gate Length 2800 msec  
 No of Gates Trace  
 Initial Time 0.4 sec  
 Final Time 3.2 sec

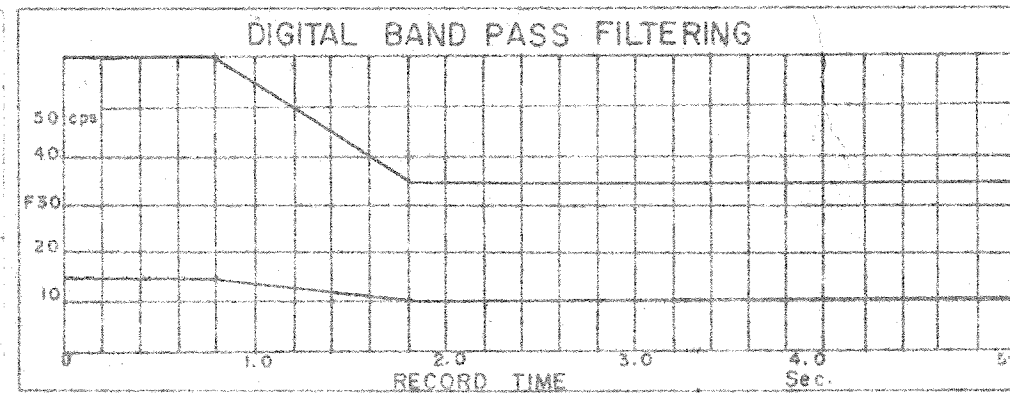

REC No	L-3964
Section No	2541-C
System Code	C 3 A
Operator	V. GEADA
Checked by	B. Biggs

LINE D 473  
 SP B 5470

