


SHOOTING PARAMETERS
24-Fold Off End
Shot by G.S.I. PTY 908
Cable Length 1600m
Group Interval 65 m
Shot Point Interval 4X33m
Average Shot Offset 412 m
Charge AIR GUN
Average Seis Depth 14 m

RECORDING PARAMETERS
System 10,000
Record Length 5.0
Sample 4 ms
GAGC Trip 0.8 s Range 90 db/s
Im. 80 db Final 10C db
Filters Hi 70 cts 24 db/oct
Lo B cps 24 db/oct
4ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
CR = 4.0 db/sec
From 1.0 sec to 4.0 sec
Water Velocity 1494 mps
Replacement Vel. 1494 mps
Equalization 15-38 sec

24-FOLD STACK
First Break Suppression
T₂₄₁ T₂₄₂ 0 secs T₁₂ T₁₁ 1.65 sec
T₂₂₀ T₂₁₇ 0.7 secs T₁₀ T₉ 1.70 sec
T₂₂₀ T₂₁₇ 0.85 secs T₁₀ T₉ 1.75 sec
T₁₂₀ T₁₁₇ 1.05 secs T₁₀ T₉ 1.80 sec
T₁₂₀ T₁₁₇ 1.25 secs T₁₀ T₉ 1.85 sec
T₁₂₀ T₁₁₇ 1.45 secs T₁₀ T₉ 1.95 sec

DECONVOLUTION
Time Varying ARD I
Filter Length 252 m sec
Gate Length 2520 m sec
No. of Gates Trace 2
Initial Times Gate No. 1
T₁ = 600 sec T₂₄ = 600 sec
Final Times Gate No. 2
T₁ = 4380 sec T₂₄ = 4380 sec

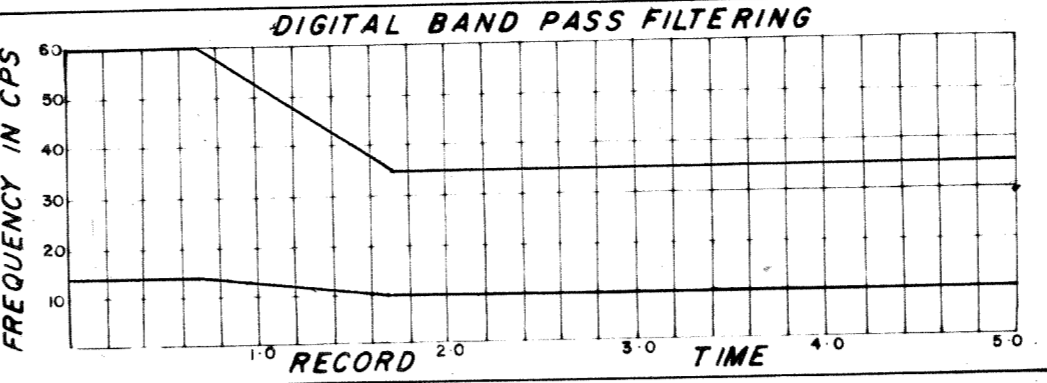

DISPLAY
Analog Filters OUT - OUT
Straight Gain
+18 +0 -20 = -2
Tape HTL - 1423
Assembled by
Checked by

REQ. No. L-3282
Section No. 1501 C
System Code C SA
Assembled by
Checked by

LINE D 462 S.P. 31885
B 2155 B 2160 B 2170 B 2180 B 2188 B 2262 B 2270 B 2280 B 2290 B 2295 B 2342 B 2350 B 2360 B 2370 B 2380 B 2387
Meters 88

