


**SHOOTING PARAMETERS**  
 24-Fold Off End  
 Shot by G.S.I. PTY 909  
 Cable Length 1600m.  
 Group Interval 65 m.  
 Shot Point Interval 4x33m.  
 Average Shot Offset 406 m.  
 Charge Air GUN  
 Average Seis Depth 14 m.

**RECORDING PARAMETERS**  
 System 10,000  
 Record Length 5.0  
 Sample 4 ms  
 GAGC Trip 0.7 s Rate 80 db/s  
 Int. 55 db Final 100 db  
 Filters Hi 70 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 4ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 $\kappa = 4.0$  db/sec.  
 From 1.0 sec. to 4.0 sec.  
 Water Velocity 1494 mps  
 Replacement Vel. 1494 mps  
 Equalization = 1-5-3-8

**24-FOLD STACK**  
 First Break Suppression  
 $T_{24}, T_{23}, T_{22}, T_{21}, T_{20}, T_{19}, T_{18}, T_{17}, T_{16}, T_{15}, T_{14}, T_{13}, T_{12}, T_{11}, T_{10}, T_9, T_8, T_7, T_6, T_5, T_4, T_3, T_2, T_1$   
 Time Varying ARD I  
 Filter Length 252 m. sec.  
 Gate Length 2520 m. sec.  
 No. of Gates Trace 2  
 Initial Times Gate No. 1  
 $T_{21} = 0.6$  sec.  $T_{24} = 0.6$  sec.  
 Final Times Gate No. 2  
 $T_1 = 4.38$  sec.  $T_{24} = 4.38$  sec.

**DECONVOLUTION**  
 Time Varying ARD I  
 Filter Length 252 m. sec.  
 Gate Length 2520 m. sec.  
 No. of Gates Trace 2  
 Initial Times Gate No. 1  
 $T_{21} = 0.6$  sec.  $T_{24} = 0.6$  sec.  
 Final Times Gate No. 2  
 $T_1 = 4.38$  sec.  $T_{24} = 4.38$  sec.

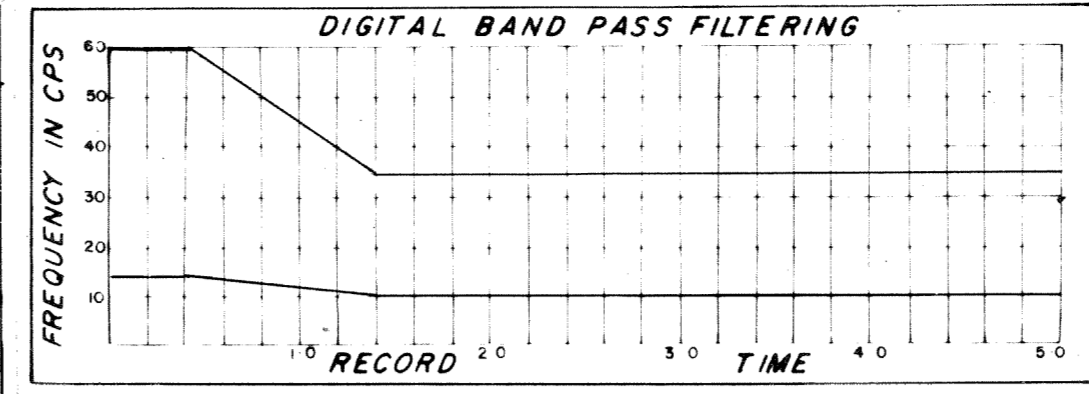

**DISPLAY**  
 Analog Filters OUT - OUT  
 Straight Gain  
 +18 +0 -18 +0  
 Tape HTL - 1395  
 WSE

REQ. No. L-3283  
 Section No. 1503 C  
 System Code C S A  
 Assembled by J.P.  
 Checked by [Signature]

Meters 94 95 96 98 94 98 99 101 98 92 Meters 89  
 B 2490 B 2500 B 2510 B 2520 B 2530 B 2540 B 2550 B 2560 B 2570 B 2580 B 2590 B 2597

