


**SHOOTING PARAMETERS**  
6-Fold Off End  
Shot by GS I PTY 906  
Cable Length 1600 m  
Group Interval 67 m  
Shot Point Interval 134 m  
Average Shot Offset 160m  
Charge Size 50 lb  
Average Seis. Depth 15 m

**RECORDING PARAMETERS**  
System 9,000  
Record Length 5.0 sec.  
Sample 2 ms  
GAGC Trip 078 s. Rate 80 db/s  
Init 46 db Final 93 db  
Filters Hi 75 cps 24 db/oct  
Lo 3 cps 24 db/oct  
2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
TAR  
 $\omega = 3.0$  db/sec  
From 0 sec to 3.0 sec  
Water Velocity 1500 mps  
Replacement Vel 1500 mps

**DECONVOLUTION**  
Time variant ARD 1  
Filter Length 212 msec  
Gate Length 232.0 msec  
No of Gates/Trace 2  
Initial times, Gate No 1 :-  
Tr 1 1.5 sec, Tr 2 4.05 sec  
Final times, Gate No 2 :-  
Tr 1 5.0 sec, Tr 2 4.0 sec

**6-FOLD STACK**  
Optimum Wide Band Stack  
RNMO Yes, Diversity Stack Yes  
First Break Suppression  
T<sub>1</sub> 0 sec T<sub>4</sub> 1.0 sec  
T<sub>2</sub> 0.4 sec T<sub>3</sub> 1.2 sec  
T<sub>5</sub> 0.8 sec T<sub>6</sub> 1.4 sec

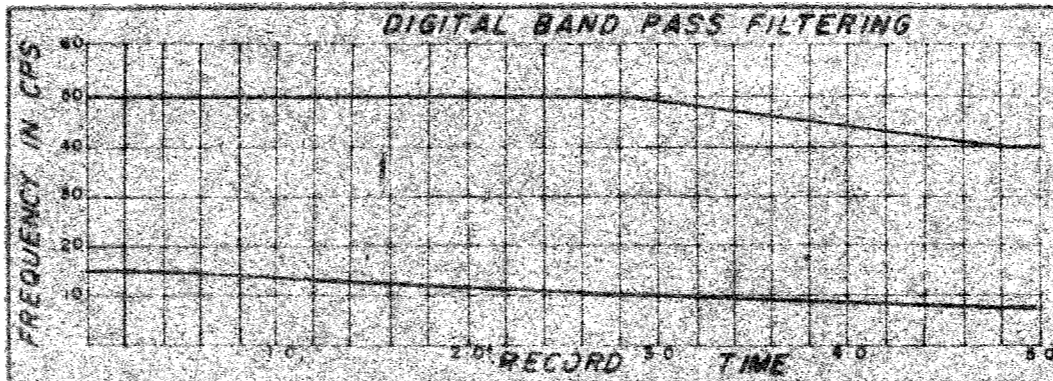

**DISPLAY**  
Analog Filters OUT-OUT  
Straight Gain  
+18 +0 -10 = +8  
Tape HTL 4106  
REQ. N° L-0110  
Section N° 4100 C  
System Code MSTV-2  
Assembled by G. VERBAKKE  
Checked by [Signature] SE

Metres 85 86 86 87 88 89 90 91 92 93 94 95 96 Metres 96  
27407 27410 27420 27430 27440 27450 27460 27470 27480 27490 27500 27510 27520 27526

