


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 134m
 Charge Size 50 lb
 Average Seis. Depth 15 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 secs
 Sample 2 ms
 GAGC Trip 078s, Rate 80db/s
 Init. 36 db, Final 100 db
 Filters Hi 75 cps, 24 db/oct
 Lo 8 cps, 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\kappa = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1500 mps
 Replacement Vel. 1500 mps

DECONVOLUTION
 Time variant ARD
 Filter Length 212 msec
 Gate Length 2400 msec
 No of Gates/Trace=2
 Initial times, Gate No 1 :-
 Tr1 1.1 sec, Tr 24 0.3 sec
 Final times, Gate No 2 :-
 Tr1 4.7 sec, Tr 24 3.9 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T_1 0 sec T_2 1.0 sec
 T_3 0.6 sec T_4 1.2 sec
 T_5 0.8 sec T_6 1.4 sec

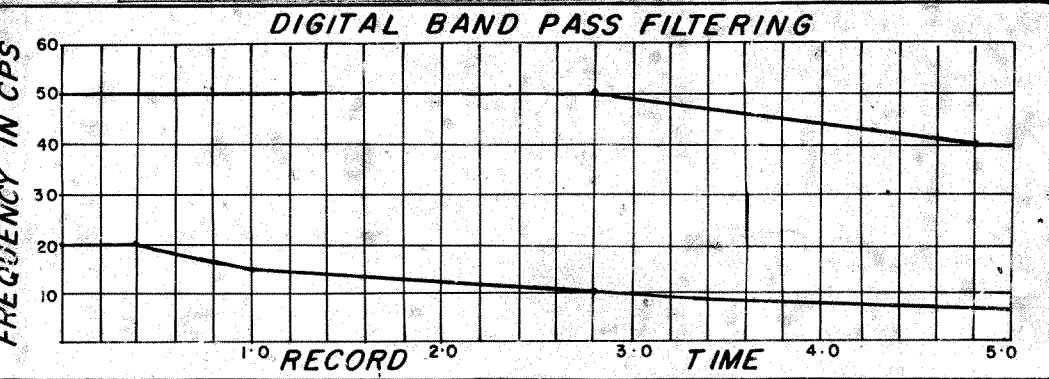

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain +12 + 0 - 6 + + 6
 Tape HTL 4246
 HTL

REQ. N° L-1263
Section N° 4134 C
System Code MSTV-2
Assembled by *[Signature]*
Checked by *[Signature]*

33 Meters 34 35 37 38 40 41 42 44 46 47 49 50 Meters 51
 H 536 H 530 H 520 H 510 H 500 H 490 H 480 H 470 H 460 H 450 H 440 H 430 H 420 H 412
 LINE D452
 S.P. 3585

