


SHOOTING PARAMETERS	
6-Fold Off End	
Shot by G.S.I. PTY 910	
Cable Length 1600 m	
Group Interval 67 m	
Shot Point Interval 134 m	
Average Shot Offset 134 m	
Charge Size 50 lb	
Average Seis. Depth 17 m	

RECORDING PARAMETERS	
System 9,000	
Record Length 5.0 sec.	
Sample 2 ms	
GAGC Trip 0.47s, Rate 80db/s	
Shot Point Interval 134 m	
Initial 4.0 db, Final 90 db	
Filters Hi 75 cps, 24 db/oct	
Lo 8 cps, 24 db/oct	
2ms Anti Alias Filtering	

SEIS EDIT & NMO	
TAR	
$\kappa = 4.0$ db/sec	
From 0 sec to 4.0 sec	
Water Velocity 1500 mps	
Replacement Vel. 1500 mps	

DECONVOLUTION	
Time variant ARD 1	
Filter Length 212 msec	
Gate Length 2400 msec	
NP of Gates/Trace = 2	
Initial times, Gate #0 1.0	
Tr 1 H sec, Tr 2 0.3 sec	
Final times, Gate #0 2.1	
Tr 1 4.7 sec, Tr 2 3.9 sec	

6-FOLD STACK	
Optimum Wide Band Stack	
RNMO Yes.	
First Break Suppression	
T <sub>1</sub> 0 sec T <sub>4</sub> 1.0 sec	
T <sub>2</sub> 0.4 sec T <sub>3</sub> 1.2 sec	
T <sub>5</sub> 0.8 sec T <sub>6</sub> 1.4 sec	

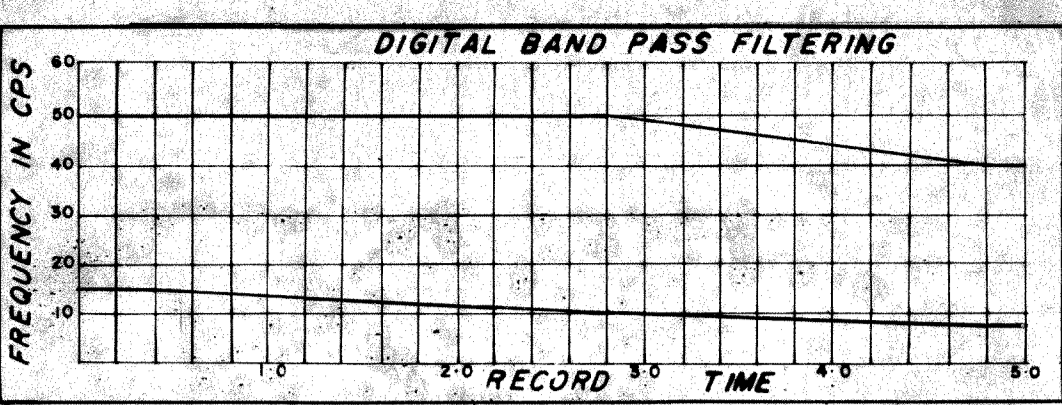

DISPLAY	
Analog Filters OUT-OUT	
Straight Gain	
+18 + 0 - 18 = - 0	
Tape HTL 4246	

REQ. N°	L-1328
Section N°	4133 C
System Code	MSTV-2
Assembled by	<i>[Signature]</i>
Checked by	<i>[Signature]</i>

