


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTY 910  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 134m  
 Charge Size 50 lb  
 Average Seis. Depth 15 m

**RECORDING PARAMETERS**  
 System 9,000  
 Record Length 5.0 sec  
 Sample 2 ms  
 GAGC Trip 0.47% Rate 80 db/sec  
 Int'l 4.0 db/Final 100 db  
 Filters Hi 75 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
**TAR**  
 $\kappa = 4.0$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1500 mps  
 Replacement Vel. 1500 mps

**DECONVOLUTION**  
 Time variant ARD 1  
 Filter Length 212 msec  
 Gate Length 2400 msec  
 No of Gates/Track 2  
 Initial Times, Gate No 1 :-  
 Tr1 1.1 sec, Tr 24 0.3 sec  
 Final Times, Gate No 2 :-  
 Tr1 4.7 sec, Tr 24 3.9 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1.0 sec  
 T<sub>3</sub> 0.6 sec T<sub>4</sub> 1.2 sec  
 T<sub>5</sub> 0.8 sec T<sub>6</sub> 1.4 sec

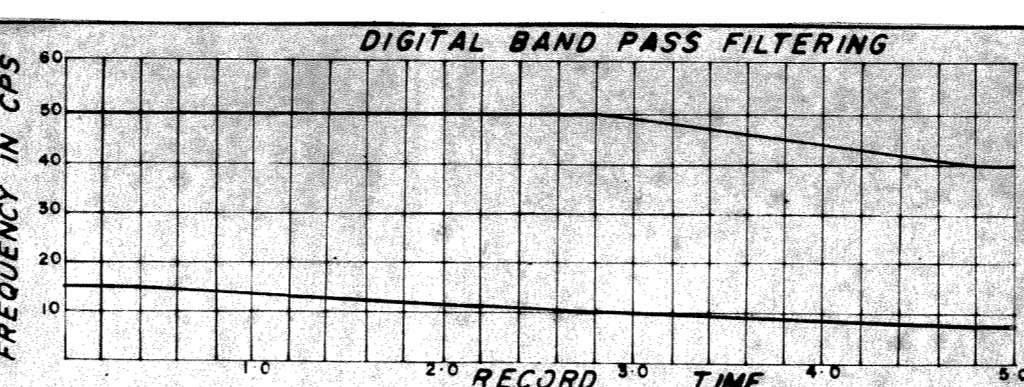

<b>DISPLAY</b>	
Analog Filters OUT-OUT	Section N° L-1102
Straight Gain +18 + 0 - 20 - 2	Section N° 4132 C
Tape HTL 4212 HTL	System Code MSTV-2
	Assembled by <i>HS</i>
	Checked by <i>HS</i>

