


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by GSI PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 134 m
 Charge Size 50 lb
 Average Seis Depth 15 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 secs
 Sample 2 ms
 GAGC Trip 0.47s, Rate 80 db/s
 Inti 40 db, Final 100 db
 Filters Hi 75 cps, 24 db/oct
 Lo 8 cps, 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 sc = 4.0 db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1500 mps
 Replacement Vel 1500 mps

DECONVOLUTION
 Time variant ARD1
 Filter Length 212 msec
 Gate Length 2400 msec
 No of Gates/Trace = 2
 Initial times, Gate No 1 :-
 Tr1 1.1 sec, Tr 24 0.3 sec
 Final times, Gate No 2 :-
 Tr1 4.7 sec, Tr 24 3.9 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₄ 1.2 sec
 T₂ 0.6 sec T₅ 1.4 sec
 T₃ 1.0 sec T₆ 1.6 sec

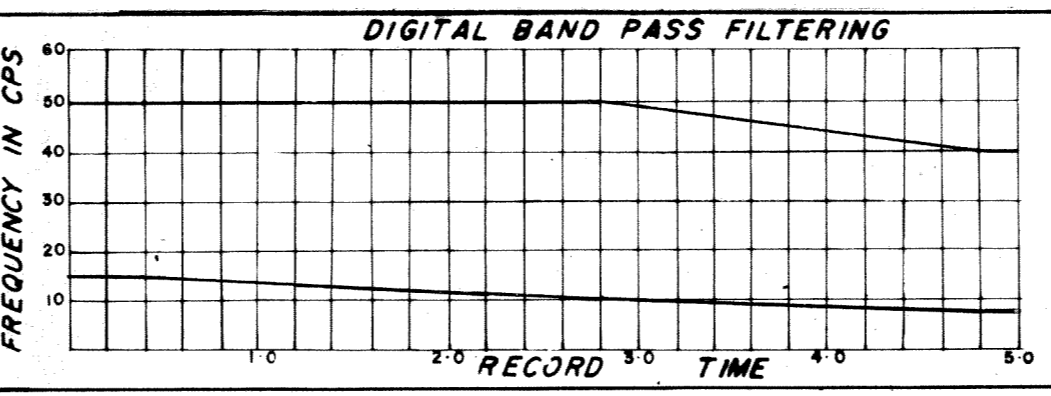

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain
 +12 +2 -20 = -6
 Tape HTL 4 220
 HTL

REQ. N° L-1098
Section N° 4131C
System Code MSTV-2
 Assembled by *W. J. O'Leary*
 Checked by *W. J. O'Leary*

