


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTY 910  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 134m  
 Charge Size 50 lb  
 Average Seis. Depth 13 m

**RECORDING PARAMETERS**  
 System 9,000  
 Record Length 5.0 secs.  
 Sample 2 ms  
 GAGC Trip 0.78, Rate 80 db/v  
 Int. 3.3 db/Final 100 db  
 Filters Hi 7.8 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 $\omega = 4.0$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1500 mps  
 Regime/ment Vel 1500 mps

**DECONVOLUTION**  
 Time variant ARD1  
 Filter Length 212 msec  
 Gate Length 2400 msec  
 No of Gates/Trace=2  
 Initial times, Gate No 1 :-  
 Tr1 1.1 sec, Tr 24 0.3 sec  
 Final times, Gate No 2 :-  
 Tr1 4.7 sec, Tr 24 3.9 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes, Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>2</sub> 1.0 sec  
 T<sub>3</sub> 0.4 sec T<sub>4</sub> 1.2 sec  
 T<sub>5</sub> 0.6 sec T<sub>6</sub> 1.4 sec

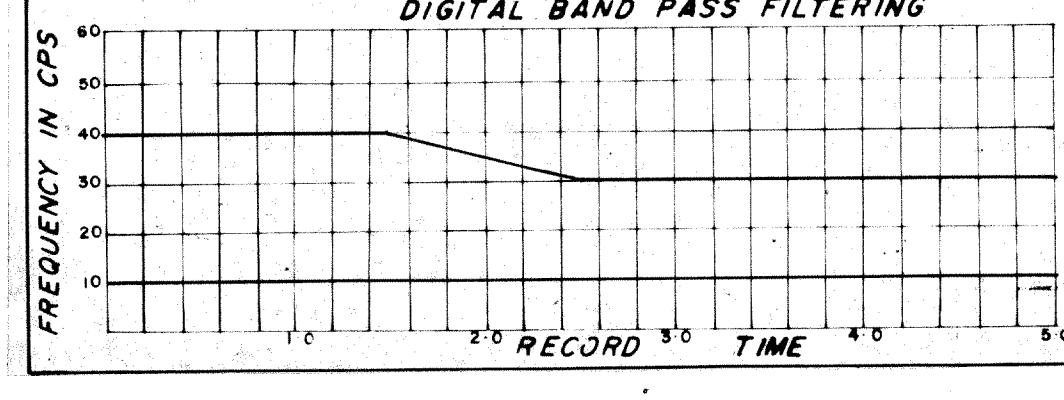

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gain +12+ 0 -18 = -6  
 Tape HTL 4329  
 REQ. N° L-2356  
 Section N° 4184 C  
 System Code MSTV-2  
 Assembled by *K. J. Farley*  
 Checked by *R. D. B.*  
 NNE

