


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 131 m
 Charge Size 50 lb
 Average Seis Depth 13 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5 0
 Sample 2ms
 GAGC Trip 0.78 s Rate 8000/s
 Int. 33 db Final 100db
 Filters Hi 75 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 n = 4.0 db/sec
 From 0 sec to 0.0 sec
 Water Velocity 1494 mps
 Replacement Vel 1494 mps

DECONVOLUTION
 Time Varying ARD I
 Filter Length 212 msec
 Gate Length 2200 msec
 No of Gates/Trace 2
 Initial Times, Gate No 1:-
 Tr1 1.2 sec, Tr2 0.46 sec
 Final Times, Gate No 2:-
 Tr1 4.5 sec, Tr2 37.6 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack NO
 First Break Suppression
 T1 = 0. sec T2 = 0.8 sec
 T3 = 0.4 sec T4 = 1.0 sec
 T5 = 0.6 sec T6 = 1.2 sec

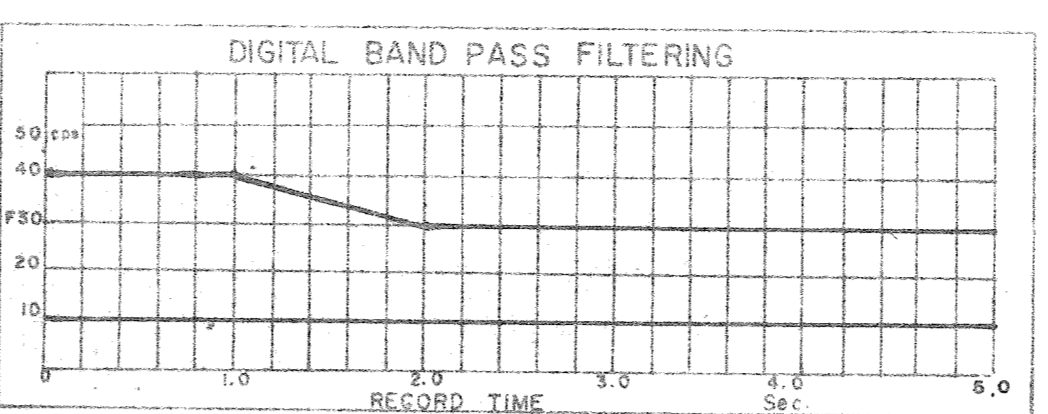

DISPLAY	REQ No.	L-2653
Analog Filters OUT-OUT	Section No.	2143-C
Straight Gain	System Code	MSTV-2
18 + 0 - 14 - 4 4	Assembled by	V. GEADA
Tape HTL - 2312	Checked by	B. Biggo

