


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 906
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 160 m
 Charge Size 50 lb
 Average Seis. Depth 10 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 secs.
 Sample 2 ms
 GAGC Trip 0.11's Rate 80 db/s
 Init 43 db/Final 100 db
 Filters Hi 75 cps. 24 db/oct
 Lo 8 cps. 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\omega = 3.0$ db/sec
 From 0 sec to 3.0 sec
 Water Velocity 1500 mps
 Replacement Vel. 1500 mps

DECONVOLUTION
 Time Invariant AR01
 Filter Length 280 msec
 Gate Length 2800 msec
 No. of Gates/Traces 1
 Initial Times, Gate No. 1
 Tr 1 0.0 sec, Tr 2 4.0 sec
 Final Times, Gate No. 1
 Tr 1 0.6 sec, Tr 2 4.3 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes, Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 0.8 sec
 T₃ 0.4 sec T₄ 1.0 sec
 T₅ 0.6 sec T₆ 1.2 sec

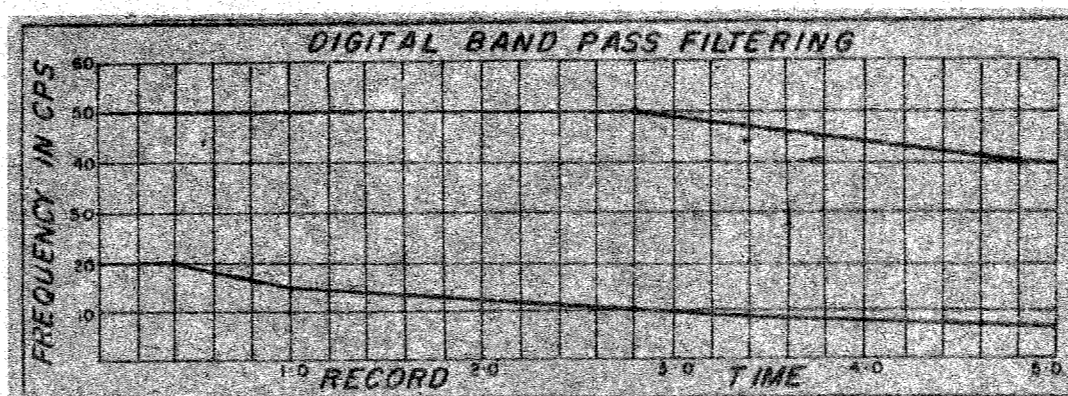

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain +18 +0 -12 + +6
 Tapes HTL 4171
 HTL

REQ. N° L-4471
Section N° 4062 IC
System Code MSTV-2
 Assembled by *K.S. Farley*
 Checked by *J. J. Allison*

N.E.

