


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 28 m
 Charge Size 50 lb
 Average Seis. Depth 14 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0
 Sample 2ms
 GAGC Trip 0.78 s Rate 80 db/1/4
 Init 3.7 db Final 10 db
 Filters Hi 7.5 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\alpha = 4.0$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1494 mps
 Replacement Vel 1494 mps

DECONVOLUTION
 Time Varying ARD I
 Filter Length 212 msec
 Gate Length 2200 msec
 No of Gates/Trace 2
 Initial Times, Gate No 1:-
 Tr1 1.20 sec, Tr2 0.46 sec
 Final Times, Gate No 2:-
 Tr1 4.50 sec, Tr2 3.76 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack NO
 First Break Suppression
 T1 0. sec T4 1.0 sec
 T2 0.4 sec T5 1.2 sec
 T3 0.8 sec T6 1.4 sec

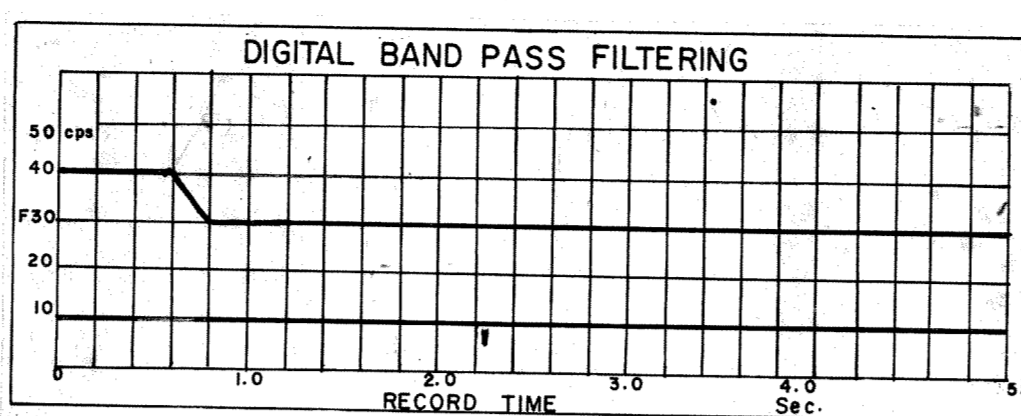

DISPLAY
 Analog Filters OUT-OUT
 Straight Gain
 +12 +4 -16 = 0
 Tape HTL 2247

REQ. N° L-1598
Section N° 2136-C
System Code MSTV-2
 Assembled by V. GEA 0 A
 Checked by R. Welch
 J.NE.

70 METERS 70 79 84 92 95 96 98 99 101 101 104 105 107 METERS 107 107
 H4185 4180 4170 4160 4150 4140 4130 4120 4110 4100 4090 4080 4070 4060 4050 H4048

