


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G. S. I. PTY910
 Case Length 1800 m
 Group Interval 6.7 m
 Shot Point Interval 13.4 m
 Average Shot Offset 137 m
 Charge Size 50 lb
 Average Seis Depth 12 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0
 Sample 2 ms
 GAGC Trc 078 Rate 0.06 m/s
 Inr 36 db Final 0.06 m/s
 Filters Hi 7.5 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR 4 0 db/sec
 From 0 sec to 104.0 sec
 Water Velocity 1494 mps
 Replacement Vel 1480 mps

DECONVOLUTION
 Time Invariant ARD
 Filter Length 252 msec
 Gate Length 2800 msec
 No of Gates / Trace 1
 Initial Times
 Tr1 1.3 sec Tr2 4.0-3.8 sec
 Final Times
 Tr3 4.1 sec Tr4 3.18 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMQ Yes Diversity Stack NO
 First Break Suppression
 Tr1=0 sec Tr4=0.8 sec
 Tr2=0.4 sec Tr5=1.0 sec
 Tr3=0.6 sec Tr6=1.2 sec

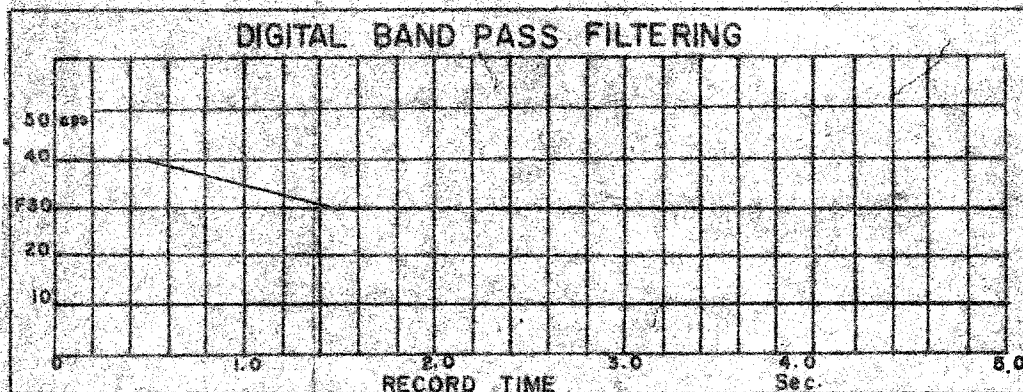

DISPLAY		REQ No.	L-2812
Analog Filters	OUT-OUT	Section No.	2148-C
Straight Gain	+18+0-20--2	System Code	MSTV-2
Tape HTL	2349	Assembled by	V. GEADA
		Checked by	B. B. G. G.

N.E.

