


**SHOOTING PARAMETERS**  
 6-Fold Off End  
 Shot by G.S.I. PTY 910  
 Cable Length 1600 m  
 Group Interval 67 m  
 Shot Point Interval 134 m  
 Average Shot Offset 134m  
 Charge Size 50 lb  
 Average Seis. Depth 15 m

**RECORDING PARAMETERS**  
 System 9,000  
 Record Length 9.0 secs  
 Sample 2 ms  
 GAGC Trip 0.78 Rate 80 db/s  
 Init 3.3 db Final 100 db  
 Filters Hi 75 cps 24 db/oct  
 Lo 8 cps 24 db/oct  
 2ms Anti Alias Filtering

**SEIS EDIT & NMO**  
 TAR  
 $\kappa = 4.0$  db/sec  
 From 0 sec to 4.0 sec  
 Water Velocity 1500 mps  
 Replacement Vel. 1500 mps

**DECONVOLUTION**  
 Time Invariant AR1  
 Filter Length 252 msec  
 Gate Length 2800 msec  
 No of Gates/Trace = 1  
 Initial times, -  
 Tr1 1.1 sec, Tr 24 0.4 sec  
 Final times, -  
 Tr1 3.7sec, Tr 24 3.0 sec

**6-FOLD STACK**  
 Optimum Wide Band Stack  
 RNMO Yes Diversity Stack Yes  
 First Break Suppression  
 T<sub>1</sub> 0 sec T<sub>4</sub> 1.4 sec  
 T<sub>2</sub> 1.0 sec T<sub>5</sub> 1.4 sec  
 T<sub>3</sub> 1.2 sec T<sub>6</sub> 1.6 sec

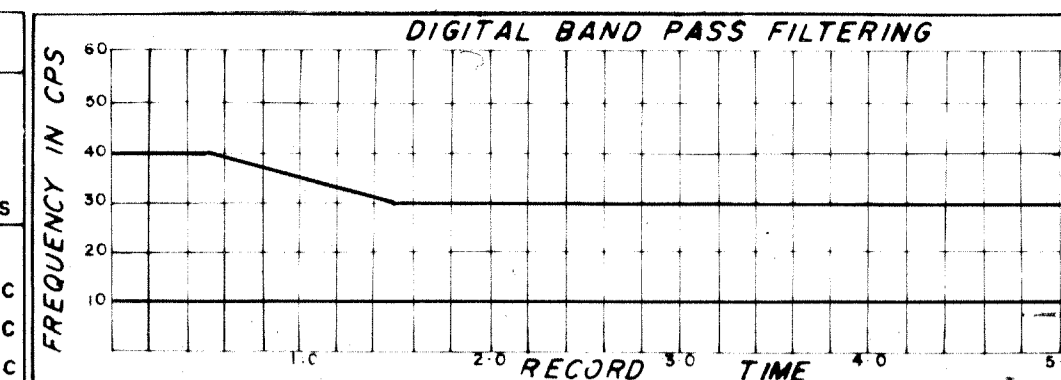

**DISPLAY**  
 Analog Filters OUT-OUT  
 Straight Gain  
 +18 = 0 -4 = +8  
 Tape HTL 4346

REQ N° L-2304  
 Section N° 4194 C  
 System Code MSTV-2  
 Assembled by *K. Farley*  
 Checked by *WS*  
 NE

