


SHOOTING PARAMETERS
 6-Fold Off End
 Shot by G.S.I. PTY 910
 Cable Length 1600 m
 Group Interval 67 m
 Shot Point Interval 134 m
 Average Shot Offset 134m
 Charge Size 50 lb
 Average Seis. Depth 15 m

RECORDING PARAMETERS
 System 9,000
 Record Length 5.0 sec.
 Sample 2 ms
 GAGC Trip 0.78s Rate 80 db/s
 Int 3.3 db Final 0.0 db
 Filters Hi 75 cps 24 db/oct
 Lo 8 cps 24 db/oct
 2ms Anti Alias Filtering

SEIS. EDIT & NMO
 TAR
 $\kappa = 4.5$ db/sec
 From 0 sec to 4.0 sec
 Water Velocity 1500 mps
 Replacement Vel 1500 mps

DECONVOLUTION
 Time variant ARD
 Filter Length 252 msec
 Gate Length 2400 msec
 No of Gates/Trace = 1
 Initial times, Gate No 1 :-
 Tr 1 1.1 sec, Tr 2 4.0-3 sec
 Final times, Gate No 1 :-
 Tr 1 3.5 sec, Tr 2 2.7 sec

6-FOLD STACK
 Optimum Wide Band Stack
 RNMO Yes Diversity Stack Yes
 First Break Suppression
 T₁ 0 sec T₂ 1.2 sec
 T₃ 0.6 sec T₄ 1.4 sec
 T₅ 1.0 sec T₆ 1.6 sec

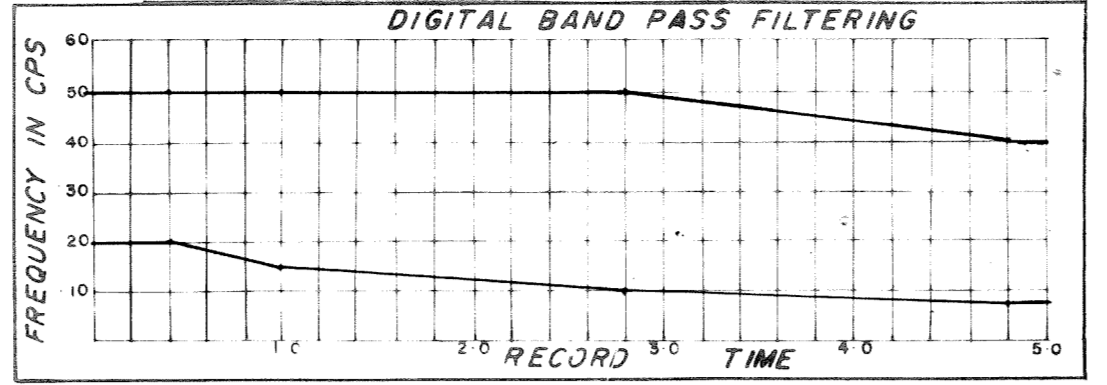

DISPLAY		REQ. N°	L-2506
Analog Filters	OUT-OUT	Section N°	4196 C
Straight Gain	+18 + 0 -2 0 -2	System Code	MSTV-2
Tape	HTL 4356	Assembled by	<i>[Signature]</i>
	HTL	Checked by	<i>[Signature]</i>

76 Meters 81 96 98 98 102 111 119 126 135 148 174 264 310 389 Meters 390
 H 10593 H 10600 H 10610 H 10620 H 10630 H 10640 H 10650 H 10660 H 10670 H 10680 H 10690 H 10700 H 10710 H 10720 H 10730 H 10740

