


SHOOTING PARAMETERS
6-Fold Off End
Shot by GS1 PTY 906
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 134 m
Average Shot Offset 160m
Charge Size 50 lb
Average Seis. Depth 15 m

RECORDING PARAMETERS
System 9,000
Record Length 5.0 sec.
Sample 2 ms
GAGC Trip 078s Rate 80 db/s
Init. 48 db Final 100 db
Filters Hi 7.5 cps 24 db/oct
Lo 8 cps 24 db/oct
2ms Anti Alias Filtering

SEIS EDIT & NMO
TAR
ec = 3.0 db/sec
From 0 sec to 3.0 sec
Water Velocity 1500 mps
Replacement Val. 1500 mps

DECONVOLUTION
Time invariant ARD!
Filter Length 252 msec
Gate Length 2600 msec
No of Gates/Trace 1
Initial times
Tr1 1.5 sec, Tr 24 1.0 sec
Final times
Tr14 1 sec, Tr 24 3.6 sec

6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack Yes
First Break Suppression
T₁ 0 sec T₂ 1.0 sec
T₃ 0.4 sec T₄ 1.4 sec
T₅ 0.8 sec T₆ 1.6 sec

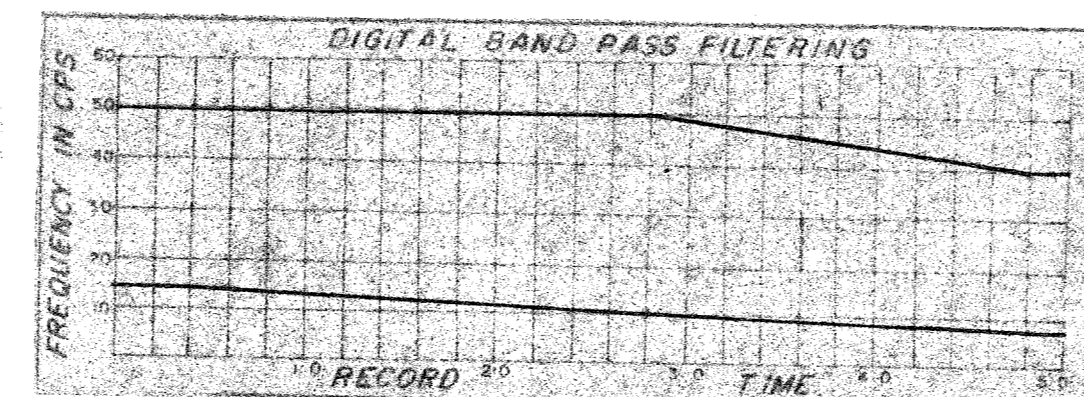

DISPLAY
Analog Filters OUT-OUT
Straight Gain
+12 + 0 -2 + +10
Tape HTL 4106

REQ. N° L-0100
Section N° 4098 C
System Code MSTV-2
Assembled by [Signature]
Checked by [Signature]
N.E.

47 -Meters 63 94 111 119 122 125 124 126 122 122 125 135 152 Meters 203
27286 27280 27270 27260 27250 27240 27230 27220 27210 27200 27190 27180 27170 27160 27151

