


SHOOTING PARAMETERS:
 24-Fold Off End
 Shot by G-S I-PTY 909
 Cable Length 1600m
 Group Interval 6.5 m
 Shot Point Interval 4x33m
 Average Shot Offset 382 m
 Charge AIR GUN
 Average Sea Depth 13 m

RECORDING PARAMETERS:
 System 10,000
 Record Length 5.0
 Sample 4 ms
 GAGC Trip 0.4 Rate 80 db/s
 Int 56 db Final 100 db
 Filters Hi 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 4ms Anti Alias Filtering

SEIS EDIT & NMO:
 TAR
 $\alpha = 4.0$ db/sec.
 From 1.0 sec to 4.0 sec.
 Water Velocity 1493 mps
 Replacement Vel. 1494 mps
 Equalisation = 15.38 secs

24-FOLD STACK:
 First Break Suppression
 $Tr_{24} = 0$ secs $Tr_{12} = Tr_{11} = 175$ secs
 $Tr_{23} = 0.1$ secs $Tr_{10} = Tr_{11} = 19$ secs
 $Tr_{22} = 0.55$ secs $Tr_{18} = Tr_{17} = 20$ secs
 $Tr_{21} = 1.05$ secs $Tr_{16} = Tr_{15} = 21$ secs
 $Tr_{19} = 1.35$ secs $Tr_{14} = Tr_{13} = 15$ secs
 $Tr_{18} = 1.6$ secs $Tr_{12} = Tr_{11} = 2$ secs

DECONVOLUTION:
 Time Varying ARD I
 Filter Length 252 m sec
 Gate Length 2520 m sec
 No. of Gates Trace 2
 Initial Times Gate No 1
 $Tr_1 = 0.6$ sec $Tr_2 = 0.6$ sec
 Final Times Gate No 2
 $Tr_1 = 4.38$ sec $Tr_2 = 4.38$ sec

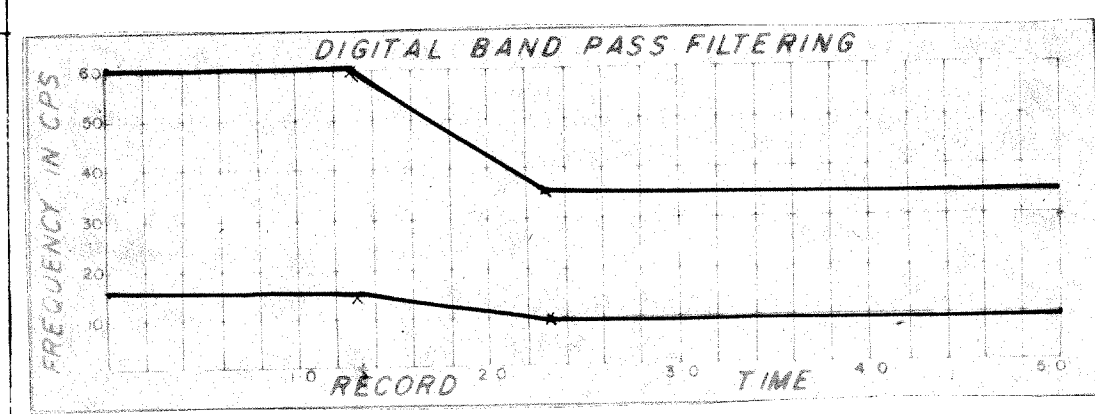

DISPLAY:
 Analog Filters OUT - OUT
 Straight Gain
 +18 +2 -18 +2
 Tape HTL - 1460

REQ. No. L-3997
 Section No. 1523 C
 System Code C S A
 Assembled by T.C.S.
 Checked by Ken Baker

