


SHOOTING PARAMETERS
 24-Fold Off End
 Shot by G-S-I-PTY 908
 Cable Length 1800 m
 Group Interval 60 m
 Shot Point Interval 425 m
 Average Shot Offset 382 m
 Charge AIR GUN
 Average Sea Depth 15 m

RECORDING PARAMETERS
 System 10,000
 Record Length 5.0
 Sample 4 ms
 GAGC Trip 1-0 s Rate 80 db/s
 Int. 54 db Final 100 db
 Filters Hi. 70 cps 24 db/oct
 Lo 8 cps 24 db/oct
 4 ms Anti Alias Filtering

SEIS EDIT & NMO
 TAR
 $\Delta t = 4.0$ db/sec
 From 1.0 sec to 4.0 sec
 Water Velocity 1494 mps
 Replacement Vel. 1494 mps
 Equalization = 15-36 sect

24-FOLD STACK
 First Break Suppression
 Tr₂₄ Tr₂₃ 0 sec Tr₁₂ Tr₁₁ 1.9 sec.
 Tr₂₂ Tr₂₁ 0.7 sec Tr₁₀ Tr₉ 2.05 sec.
 Tr₂₀ Tr₁₉ 0.9 sec Tr₈ Tr₇ 2.2 sec.
 Tr₁₈ Tr₁₇ 1.3 sec Tr₆ Tr₅ 2.4 sec.
 Tr₁₆ Tr₁₅ 1.5 sec Tr₄ Tr₃ 2.6 sec.
 Tr₁₄ Tr₁₃ 1.7 sec Tr₂ Tr₁ 2.75 sec.

DECONVOLUTION
 Time Varying ARD 1
 Filter Length 252 m sec.
 Gate Length 2520 m sec.
 No. of Gates Trace 2
 Initial Times Gate No. 1
 Tr₁ = 0.6 sec. Tr₂ = 0.6 sec.
 Final Times Gate No. 2
 Tr₁ = 4.38 sec. Tr₂ = 4.58 sec.

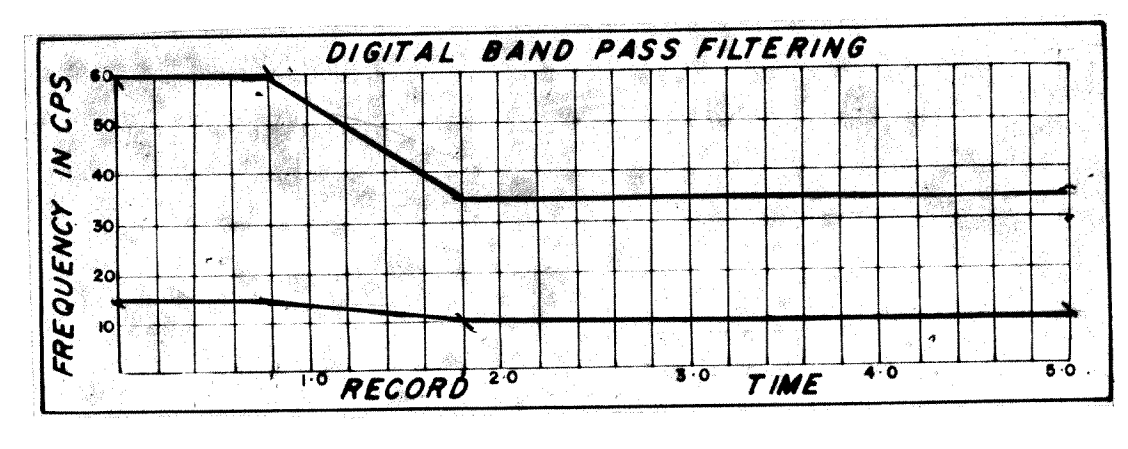

DISPLAY
 Analog Filters OUT - OUT
 Straight Gain
 + 12 + 0 - 6 - + 6
 Tape HTL - 1499
 REQ. No. L-3973
 Section No. 1528 C
 System Code C S A
 Assembled by ANA
 Checked by R. Barber
 J SE

117 Meters 117 117 116 116 116 119 125 134 143 165 232 Meters
 B 5446 B 5440 B 5430 B 5420 B 5410 B 5400 B 5390 B 5380 B 5370 B 5360 B 5350 B 5340 B 5333

