


6-FOLD STACK
Optimum Wide Band Stack
RNMO Yes Diversity Stack Yes
First Break Suppression
T₁ 0 sec T₂ 1.2 sec
T₃ 0.6 sec T₄ 1.4 sec
T₅ 1.0 sec T₆ 1.6 sec

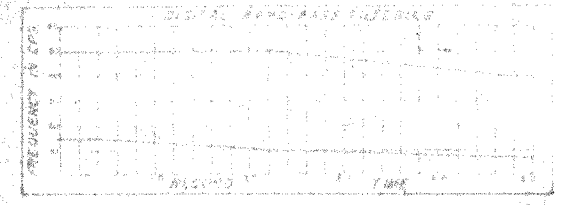

DISPLAY	REQ. N°	L-4077
Analog Filters OUT-OUT	Section N°	1049 C
Straight Gain +18 + 0 -20 = -2	System Code	MSTV-2
Tapes HTL III B	Assembled by	L.M.
HTL	Checked by	A.C.

AGIP
ADRIATIC SEA ZONE B
LINE B 444 (TVF)
November 1967 GEOPHYSICAL SERVICE INTERNATIONAL LTD

SHOOTING PARAMETERS
6-Fold Off End
Shot by G.S.I. PTY 906
Cable Length 1600 m
Group Interval 67 m
Shot Point Interval 133 m
Average Shot Offset 135 m
Charge Size 50 lb
Average Seis. Depth 12 m

RECORDING PARAMETERS
System 9000
Record Length 5.0
Sample 2 ms
GAGC Trip 0.78s Rate 80db/s
Int. 4.8 db Final 100db
Filters Hi 75 cps 24db/oct
Lo 8 cps 24db/oct
2ms Anti Alias Filtering

LINE B 428
SP 1032
133 131 130 130 128 128 127 124 125
1260 1270 1280 1290 1300 1310 1320 133 1331 1340 1350 1360
Meters 127 126 Meters

