

A362S

BLUE STAR
 AREA ADRIATIC
 LINE BBS-4 (TVF)
 SHOT March 1970
 PROCESSED May 1970
 GEOPHYSICAL SERVICE INTERNATIONAL LTD

SHOOTING PARAMETERS

24-Fold 11-End 2 Gun
 Cable Length 6.0 km
 Group Interval 66.6 m
 Shot Point Interval 43.3 m
 Average Shot Offset 232 m
 Total Gun Size 900 counts
 Average ...

RECORDING PARAMETERS

System DFS III Binary Gain
 Record Length 5.0 secs Sample 4 msec
 Gain Expansion rate 1500 db/sec
 Release Rate 94 db/sec
 Initial gain 42 db Final Gain 90 db
 Gain constant 30 db Trip delay 280 sec
 Filters H 60 Hz 72 db/oct
 L 8 - 18 db/oct
 4 ms 2-1/2 as Filtering


VERTICAL STACK
 TAR Applied
 CX 4.0 db/sec 0.0-4.0 sec
 Two-Fold Vertical Stack

SE'S EDIT & NMC
 Static and Dynamic
 Corrector
 Equalization 6.5 sec
 Wave velocity 1.4 km/sec
 Replacement vel 1.4 km/sec


12-FOLD STACK
 First Break Suppressor
 1-Fold = 0-10 secs 7-Fold = 1-48 secs
 2-Fold = 0-70 secs 8-Fold = 1-60 secs
 3-Fold = 0-85 secs 9-Fold = 1-65 secs
 4-Fold = 1-10 secs 10-Fold = 1-70 secs
 5-Fold = 1-20 secs 11-Fold = 1-75 secs
 6-Fold = 1-30 secs 12-Fold = 1-80 secs
 Equalization 4.0 sec

TIME VARIATION
 Time varying
 Filter Length 220 msec
 Gate Length 2667 msec
 No. of Gates 2
 0.5 sec 2-0.5 sec
 4.5 sec 2-4.5 sec

TV NORMALIZATION
 6 Normalization Gates
 Gate 1 0.25-1.04 secs
 Gate 6 4.21-5.0 secs
 Scalers applied in a
 Time-Varying manner

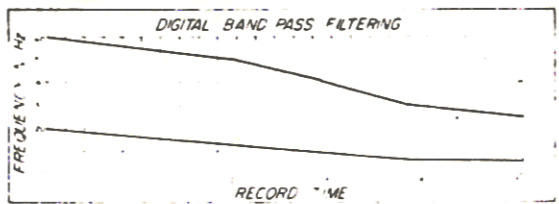

DISP. 24
 2x12 Fold Coverage
 Analog Filters 12-12-12
 Request No. 4-6083
 Tape No. I-1-3
 Section No. B I III

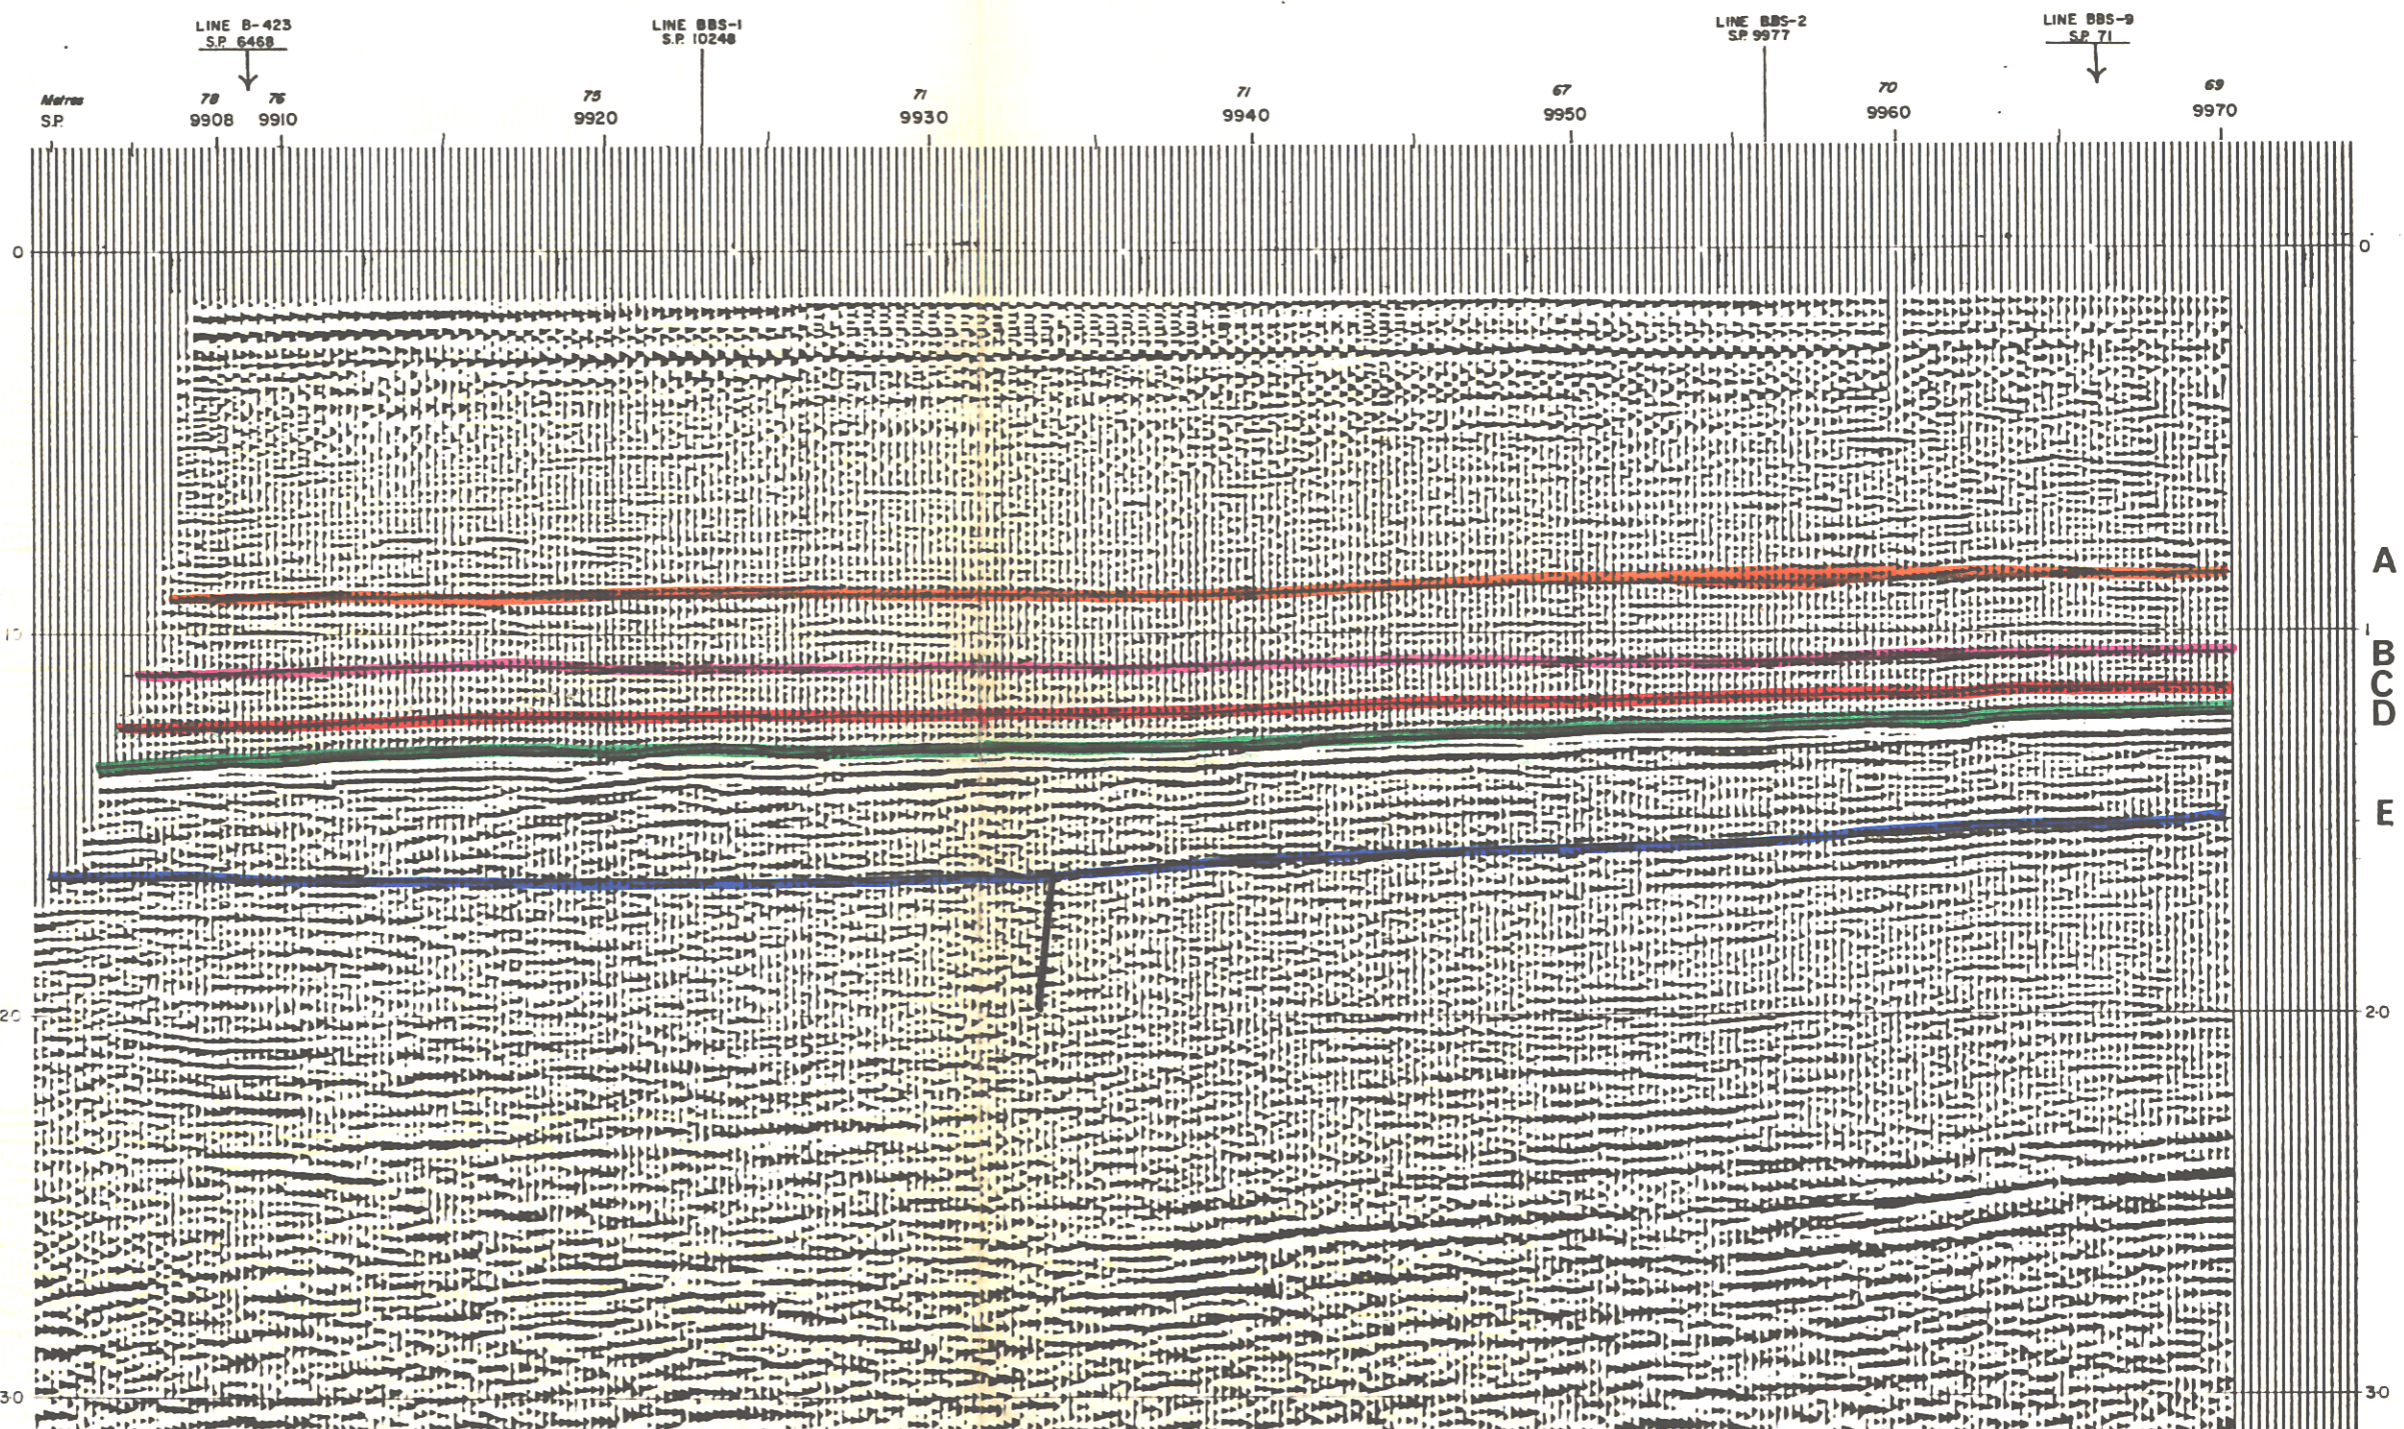

A
 B
 C
 D
 E