


# SEISMIC LINE B 425

DISPLAY	
Analog Filters	OUT - OUT
Stretch Gain	- 18.0 - 18.0 + 2
Times HTL	10.82
HTL	

REQ N°	L-3701
Section N°	0341
System Code	MSTV 1
Assembled by	S.A.K.
Checked by	P.A.

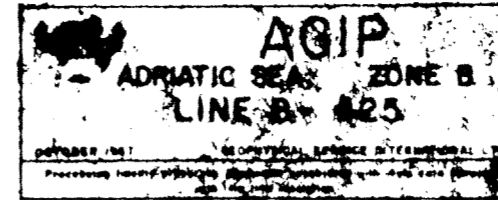

SHOOTING PARAMETERS	
12-Pole On	End
Shot in S. S. 1	Reg. 800
Scale Length	2400m
Scale Interval	100m
Shot Point Interval	100m
Average Shot Offset	94m
Charge Size	50m
Average Shot Depth	18 m

RECORDING PARAMETERS	
System	TRIO
Display Length	2000m
Sample Rate	1000
Shot Point	100m
Shot Point Interval	100m
Average Shot Offset	94m
Charge Size	50m
Average Shot Depth	18 m

SEIS EDIT & NMO	
Time Interval	ARD 1
Fiber Length	2000m
Scale Length	2400m
Scale Interval	100m
Shot Point Interval	100m
Average Shot Offset	94m
Charge Size	50m
Average Shot Depth	18 m

DECONVOLUTION	
Time Interval	ARD 1
Fiber Length	2000m
Scale Length	2400m
Scale Interval	100m
Shot Point Interval	100m
Average Shot Offset	94m
Charge Size	50m
Average Shot Depth	18 m

12-FOLD STACK	
Shot Point	100m
Shot Point Interval	100m
Average Shot Offset	94m
Charge Size	50m
Average Shot Depth	18 m

